



UNITED STATES PATENT AND TRADEMARK OFFICE

COMMISSIONER FOR PATENTS
UNITED STATES PATENT AND TRADEMARK OFFICE
WASHINGTON, D.C. 20503
www.uspto.gov

APPLICATION NUMBER	FILING RECEIPT DATE	FIRST NAMED APPLICANT	ATTORNEY/AGENT NUMBER
09/620,108	07/20/2000	Christopher G. Hipp	067856.0110

Baker Botts LLP
2001 Ross Avenue
Dallas, TX 75201-2980



RECEIVED

DEC 13 2001

OFFICE OF ELECTIONS
DEPUTY ASSISTANT

FORMALITIES LETTER



OC000000005389967

Date Mailed: 09/11/2000

NOTICE OF OMITTED ITEM(S) IN A NONPROVISIONAL APPLICATION

FILED UNDER 37 CFR 1.53(b)

A filing date has been accorded to the above-identified nonprovisional application papers; however, the following item(s) appear to have been omitted from the application:

- Page(s) **35,37** of the specification (description and claims).


I. Should applicant contend that the above-noted omitted item(s) was in fact deposited in the Patent and Trademark Office (PTO) with the nonprovisional application papers, a copy of this Notice and a petition (and \$130.00 petition fee (37 CFR 1.17(i))) with evidence of such deposit **must** be filed within **TWO MONTHS** of the date of this Notice. The petition fee will be refunded if it is determined that the item(s) was received by the PTO.

II. Should applicant desire to supply the omitted item(s) and accept the date that such omitted item(s) was filed in the PTO as the filing date of the above-identified application, a copy of this Notice, the omitted item(s) (with a supplemental oath or declaration in compliance with 37 CFR 1.63 and 1.64 referring to such items), and a petition under 37 CFR 1.182 (with the \$130.00 petition fee (37 CFR 1.17(h))) requesting the later filing date **must** be filed within **TWO MONTHS** of the date of this Notice.

III. The failure to file a petition (and petition fee) under the above options (I) or (II) within **TWO MONTHS** of the date of this Notice (37 CFR 1.181(f)) will be treated as a constructive acceptance by the applicant of the application as deposited in the PTO. **THIS TWO MONTH PERIOD IS NOT EXTENDABLE UNDER 37 CFR 1.136(a) or (b)**. In the absence of a timely filed petition in reply to this Notice, the application will maintain a filing date as of the date of deposit of the application papers in the PTO, and original application papers (i.e., the original disclosure of the invention) will include only those application papers present in the PTO on the date of deposit.

In the event that applicant elects not to take action pursuant to options (I) or (II) above (thereby constructively electing option (III)), amendment of the specification to renumber the pages consecutively and cancel incomplete sentences caused by any omitted page(s), and/or amendment of the specification to cancel all references to any omitted drawing(s), relabel the drawing figures to be numbered consecutively (if necessary), and correct the references in the specification to the drawing figures to correspond with any relabelled drawing figures, is required. Any drawing changes should be accompanied by a copy of the drawing figures showing the proposed changes in red ink. Such amendment and/or correction to the drawing figures, if necessary, should be by way of preliminary amendment submitted prior to the first Office action to avoid delays in the prosecution of the application.

A copy of this notice MUST be returned with the reply.

A handwritten signature in dark ink, appearing to read "N. H. [unclear]", is written over a horizontal line.

Customer Service Center

Initial Patent Examination Division (703) 308-1202

PART 2 - COPY TO BE RETURNED WITH RESPONSE



rather than simply broadcasting all messages received to every node coupled with management network interface 49.

A communications link 172 distributes data between hub chip 166 and an Ethernet connector 174. Accordingly, Ethernet connector 174 may be coupled with remote management system 70, of management network 47. In a particular embodiment, management network interface 49 may be provided without single board computer 160. In this embodiment, communication between web server processing cards 32 and remote management system 70 may be conducted according to the preceding description.

In another embodiment, single board computer 160 may be provided with management network interface 49, or management network interface 49 may be upgraded in the future to include single board computer 160. Accordingly, connectors 176 and 178 are typically provided upon management network interface card 48, to facilitate the installation of single board computer 160.

A communication link 182 couples hub chip 166 with an Ethernet connector 184 associated with single board computer 160. Accordingly, when properly installed, single board computer 160 receives all broadcast signals which are received by hub chip 166. Single board computer 160 collects, stores, calculates, analyzes and communicates this information to remote management system 70 and/or other components of high density server network 30. Communication between single board computer 160 and remote management system 70 occurs via Ethernet connector 186.

When single board computer 160 and its associated Ethernet connector 186 are present upon management network interface 49, Ethernet connector 174 is no longer

reset upon any particular web server processing card with which high density connector 164 is coupled.

5 Management network interface 40 includes the ability to perform a hardware reset of any particular web server processing card. Management network interface 40 also includes the ability to perform software resets of various components of network 30. In a particular embodiment, single board computer 160 collects telemetry data regarding the use, performance and operation of many components of each web server processing card 32, which
10 will be described later in more detail. Such data may be stored within single board computer 160 and/or forwarded to remote management system 70, for further processing.

The "Received" stamp of the Patent and Trademark Office imprinted hereon acknowledges the filing of:

<input checked="" type="checkbox"/> Circle One: <input checked="" type="checkbox"/> New Appin.: C.P.A., Con.: CIP., DIV.: <input checked="" type="checkbox"/> Provisional; Converted Provisional <input checked="" type="checkbox"/> DECLARATION/POWER OF ATTORNEY <input checked="" type="checkbox"/> ASSIGNMENT <input checked="" type="checkbox"/> VERIFIED STATEMENT <input checked="" type="checkbox"/> FORMAL DWGS <u>9</u> PAGES <input type="checkbox"/> INFORMAL DWGS _____ PAGES <input type="checkbox"/> Circle One: AMENDMENT/RESPONSE _____	<input type="checkbox"/> EXTENSION OF TIME _____ MTHS _____ <input type="checkbox"/> NOTICE OF APPEAL _____ <input type="checkbox"/> APPEAL BRIEF _____ <input type="checkbox"/> ISSUE FEE <u>{104265 \$501.-</u> <input checked="" type="checkbox"/> CHECK NO. <u>104269</u> AMT.: <u>\$40.00</u> <input checked="" type="checkbox"/> SERIAL NO. _____ <input type="checkbox"/> OTHER _____
--	--

NAME OF INVENTOR(S):

Hipp et al

TITLE OF INVENTION:

Data I/O Management S&M

CLIENT OR APPLICANT:

RocketLogix

B&B FILE NO.:

067856.0110

MAILED: *7-20-00*

EXPRESS ☒

EL 501044284 US

RECEIPT NO.:

DUE:

ATTY/SECY:

LKP/leg

CERTIFICATE

OF MAILING ☒

HAND DELIVERED ☐

RECEIPT DATE & SERIAL NO:

JC873 U.S. PTO

09/620108



07/20/00

RECEIVED

JUL 31 2000

BAKER & BOTTS, L.L.P.

POST OFFICE TO ADDRESSEE



ORIGIN (POSTAL USE ONLY)	
PO ZIP Code 7 33	Day of Delivery Next
Date In 7 30 00	Postage S 1575
Time In AM 12:12 PM	Return Receipt Fee
Weight 1 lbs 1 oz	Int'l Alpha Country Code
No Delivery Weekend	Acceptance Clerk Initials MAH
	Total Postage & Fees S 1575
	Insurance Fee


CUSTOMER USE ONLY
METHOD OF PAYMENT: ☐ WAIVER OF SIGNATURE (Domestic Only) ☐ I have delivered this article without obtaining signature of addressee or addressee's agent. (If delivery employee judges that article can be delivered without signature and I authorize that delivery employee a signature constitutes valid proof of delivery.)
Signature of Addressee: _____
Date: _____

FROM: (PLEASE PRINT) PHONE: _____
TO: (PLEASE PRINT) PHONE: _____

BAKER BOOTS L.L.P.
2001 ROSS AVE STE 200
DALLAS TX 75201-2980


067856.0110 LKP/eag 03089

PRESS HARD. You are making 3 copies.
FOR PICKUP OR TRACKING CALL 1-800-222-1811 www.usps.gov



EL501044284US

SEE REVERSE SIDE FOR
SERVICE GUARANTEE AND LIMITS
INSURANCE COVERAGE

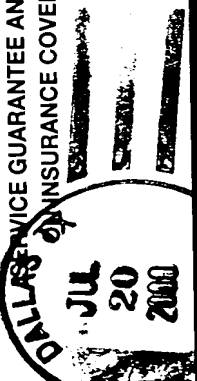

Customer Copy
Label 11-F July 1997

519
F02
T21

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of: HIPP, et al.
Date Filed: July 20, 2000
Title: *Data I/O Management System and Method*

BOX PATENT APPLICATION

Honorable Assistant Commissioner

For Patents

Washington, D.C. 20231

Dear Sir:

CERTIFICATE OF MAILING BY EXPRESS MAIL

I hereby certify that the attached Patent Application, Declaration and Power of Attorney, Assignment, transmittal forms, formal drawings and checks in the amounts of \$501.00 and \$40.00, are being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 C.F.R. § 1.10 on this 20th day of July, 2000 and addressed to the Assistant Commissioner for Patents, Washington, D.C. 20231.

Willie Jiles

Willie Jiles

Express Mail Receipt
No. EL501044284US
Attorney's Docket:
067856.0110

EL 501044284US

PATENT APPLICATION

TRANSMITTAL FOR U.S. PATENT APPLICATION
UNDER 37 CFR §1.53(b)

Box Patent Application
ASSISTANT COMMISSIONER
OF PATENTS
Washington, D.C. 20231
Sir:

Attorney's Docket: 067856.0110

Transmitted herewith for filing is the original patent application of:

Inventor: HIPP, et al.

For: DATA I/O MANAGEMENT SYSTEM AND METHOD

Enclosed are: Specification, Claims and Abstract (69 Total Pages)
Nine sheets of Formal Drawings
Declaration and Power of Attorney
An Assignment of the invention to RocketLogix, Inc. is attached. A
separate cover sheet in compliance with 37 C.F.R. § 3.28 and § 3.31 is included with
an Assignment recordal fee of \$40.00 pursuant to 37 C.F.R. § 1.21(h).

FEE CALCULATION					FEE
	Number		Number Extra	Rate	Basic Fee \$345.00
Total Claims	33	-20	13	X \$ 9 =	117.00
Independent Claims	4	- 3	1	X \$39 =	39.00
TOTAL FILING FEE =					\$501.00

Enclosed is a check in the amount of \$501.00 for filing fee. Please charge any
additional fees or credit any overpayment to Deposit Account No. 02-0384 of Baker
Botts L.L.P. A duplicate copy of this sheet is enclosed.

BAKER BOTTS L.L.P.
Attorneys for Applicant


Luke K. Pedersen

Registration No 45,003

Date: July 20, 2000

<div>Received Stamp of L and Placeholder Office Imprinted Hereon Below</div> <div><input checked="" type="checkbox"/> Circle One New Appin.; C.P.A.; Con.; CIP.; DIV.; Provisional; Converted Provisional DECLARATION/POWER OF ATTORNEY ASSIGNMENT VERIFIED STATEMENT FORMAL DWGS <u>9</u> PAGES <input type="checkbox"/> INFORMAL DWGS _____ PAGES <input type="checkbox"/> Circle One: AMENDMENT/RESPONSE _____</div>		<div><input type="checkbox"/> EXTENSION OF TIME _____ MTHS _____ <input type="checkbox"/> NOTICE OF APPEAL _____ <input type="checkbox"/> APPEAL BRIEF _____ <input type="checkbox"/> ISSUE FEE { <u>104265</u> \$ <u>501.-</u> <input checked="" type="checkbox"/> CHECK NO. <u>104264</u> AMT.: \$ <u>40.00</u> <input checked="" type="checkbox"/> SERIAL NO. _____ <input type="checkbox"/> OTHER _____</div>
NAME OF INVENTOR(S): <u>Hipp et al</u>		RECEIPT DATE & SERIAL NO:
TITLE OF INVENTION: <u>Data I/O Management SW</u>		
CLIENT OR APPLICANT: <u>Rocknet Logic</u>	B&B FILE NO.: <u>067856.0110</u>	
MAILED: <u>7-20-00</u> DUE: ATTY/SECY: <u>LKP/ea</u>		
EXPRESS <input checked="" type="checkbox"/> <u>EL501044284 US</u> RECEIPT NO.: _____ CERTIFICATE OF MAILING <input checked="" type="checkbox"/> HAND DELIVERED <input type="checkbox"/>		



EL501044284US

ORIGIN (POSTAL USE ONLY)			DELIVERY (POSTAL USE ONLY)		
PO ZIP Code	Day of Delivery Next <input type="checkbox"/> Second <input type="checkbox"/>	Flat Rate Envelope <input type="checkbox"/>	Delivery Attempt	Time Mo. Day AM PM	Employee Signature
Date In Mo. Day Year	12 Noon <input type="checkbox"/> 3 PM <input type="checkbox"/>	Postage \$	Delivery Attempt	Time Mo. Day AM PM	Employee Signature
Time In <input type="checkbox"/> AM <input type="checkbox"/> PM	Military 2nd Day <input type="checkbox"/> 3rd Day <input type="checkbox"/>	Return Receipt Fee	Delivery Date	Time Mo. Day AM PM	Employee Signature
Weight lbs. ozs.	Int'l Alpha Country Code	COD Fee Insurance Fee	Signature of Addressee or Agent		
No Delivery <input type="checkbox"/> Weekend <input type="checkbox"/> Holiday	Acceptance Clerk Initials	Total Postage & Fees \$	X Name - Please Print X		
CUSTOMER USE ONLY METHOD OF PAYMENT: Express Mail Corporate Acct. No. Federal Agency Acct. No. or Postal Service Acct. No.			<input type="checkbox"/> WAIVER OF SIGNATURE (Domestic Only). Additional merchandise insurance is void if waiver of signature is requested. I wish delivery to be made without obtaining signature of addressee or addressee's agent (if delivery employee judges that article can be left in secure location) and I authorize that delivery employee's signature constitutes valid proof of delivery. NO DELIVERY <input type="checkbox"/> Weekend <input type="checkbox"/> Holiday		
FROM: (PLEASE PRINT) PHONE () BAKER BOTTS L.L.P. 2001 ROSS AVE STE 60C DALLAS TX 75201-2980 067856.0110 LKP/eag 03089			TO: (PLEASE PRINT) PHONE () BOX PATENT APPLICATION ASSISTANT COMMISSIONER OF PATENTS WASHINGTON DC 20231-9999		

Mailing Label
Label 11-F July 1997

519
F02
T21

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of: HIPP, et al.
Date Filed: July 20, 2000
Title: *Data I/O Management System and Method*

BOX PATENT APPLICATION

Honorable Assistant Commissioner

For Patents

Washington, D.C. 20231

Dear Sir:

CERTIFICATE OF MAILING BY EXPRESS MAIL

I hereby certify that the attached Patent Application, Declaration and Power of Attorney, Assignment, transmittal forms, formal drawings and checks in the amounts of \$501.00 and \$40.00, are being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 C.F.R. § 1.10 on this 20th day of July, 2000 and addressed to the Assistant Commissioner for Patents, Washington, D.C. 20231.

Willie Jiles

Willie Jiles

Express Mail Receipt
No. EL501044284US
Attorney's Docket:
067856.0110

EL501044284US

Serial or Patent No.

Filed or Issued:

Title: DATA I/O MANAGEMENT SYSTEM AND METHOD

**VERIFIED STATEMENT (DECLARATION) CLAIMING SMALL ENTITY STATUS
(37 CFR 1.9(f) & 1.27(c)) – SMALL BUSINESS CONCERN**

I hereby declare that I am an official of the small business concern empowered to act on behalf of the concern identified below:

Name of Small Business Concern: RocketLogix, Inc.
Address of Small Business Concern: 5956 Sherry Lane
Dallas, TX 75225

I hereby declare that the above-identified small business concern qualifies as a small business concern as defined in 13 CFR 121.12, and reproduced in 37 CFR 1.9(d), for purposes of paying reduced fees to the United States Patent and Trademark Office, in that the number of employees of the concern, including those of its affiliates, does not exceed 500 persons. For purposes of this statement, (1) the number of employees of the business concern is the average over the previous fiscal year of the concern of the persons employed on a full-time, part-time or temporary basis during each of the pay periods of the fiscal year, and (2) concerns are affiliates of each other when either, directly or indirectly, one concern controls or has the power to control the other, or a third party or parties controls or has the power to control both.

I hereby declare that rights under contract or law have been conveyed to and remain with the small business concern identified above with regard to the invention, entitled DATA I/O MANAGEMENT SYSTEM AND METHOD by inventors Christopher G. Hipp, Walter L. Johnston, Jr., Guy B. Irving, David M. Kirkeby and Walter R. Otto, identified in the specification filed herewith.

If the rights held by the above-identified small business concern are not exclusive, each individual, concern or organization having rights in the invention is listed below, and no rights to the invention are held by any person, other than the inventor, who would not qualify as an independent inventor under 37 CFR 1.9(c) if that person made the invention, or by any concern which would not qualify as a small business concern under 37 CFR 1.9(d), or a nonprofit organization under 37 CFR 1.9(e):

NONE


I acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or my maintenance fee due after the date on which status as a small entity is no longer appropriate. (37 CFR 1.28(b)).

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application, any patent issuing thereon, or any patent to which this verified statement is directed.

Name of Person Signing: John R. W. Cracken
Title of Person if other than owner: Chairman, President and CEO
Address of Person Signing: 5956 Sherry Lane
Dallas, TX 75225

Signature:

Date:


7.2.00

DAL01:538780.1

FORM PTO 1595
1-31-92RECORDATION FORM COVER SHEET
PATENTS ONLYU.S. DEPARTMENT OF COMMERCE
Patent and Trademark Office

To the Honorable Commissioner of Patents and Trademarks. Please record the attached original documents or copy thereof.

1. Name and Address of Conveying Party(ies):

Christopher G. Hipp
6242 Llano Avenue
Dallas, TX 75214
Individual Citizenship: United States of America

Additional name(s) of conveying party(ies) attached?

☒ Yes ☐ No

2. Name and Address of receiving Party(ies):

Name: RocketLogix, Inc.
Internal Address:
Street Address: 5956 Sherry Lane
Dallas
City: Texas Zip: 75225
State:

State of Incorporation: Delaware

Additional name(s) & Address(es) attached? ☐ Yes ☒ No

3. Nature of conveyance:

☒ Assignment ☐ Merger
☐ Security Agreement ☐ Change of Name
☐ Other

Execution Date: July 20, 2000

4. Application number(s) or patent number(s):

If this document is being filed together with a new application, the execution date of the application is: July 20, 2000

A. Patent Application No.(s):

B. Patent No.(s):

Additional Numbers ☐ Yes ☐ No

5. Name and address of party to whom correspondence concerning document should be mailed to:

Name: Kevin J. Meek
Internal Address: BAKER BOTTS L.L.P.
Street Address: 2001 Ross Avenue
City: Dallas
State: Texas Zip: 75201-2980

6. Total number of application and patents involved: One

7. Total Fee (37C.F.R. 3.41): \$40.00

☒ Enclosed
☐ Authorized to be charged to deposit account

8. Deposit Account Number:

(Attach Duplicate Copy of this page if paying by deposit account)

DO NOT USE THIS SPACE

9. Statement and signature.

To the best of my knowledge and belief, the foregoing information is true and correct and any attached copy is a true copy of the original document.

Luke K. Pedersen

Signature

July 20, 2000

Date

Total number of pages including cover sheet

5

OMB No. 0651-0011 (exp. 4/94)

Do not detach this portion

Mail documents to be recorded with required cover sheet information:

Commissioner of Patents and Trademarks
Box Assignments
Washington, D.C. 20231

Public burden reporting for this sample cover sheet is estimated to average about 30 minutes per document to be recorded, including time for reviewing the document and gathering the data needed, and completing and reviewing the sample cover sheet. Send comments regarding this burden estimate to the U.S. Patent and Trademark Office, Office of Information Systems, PK2-1000C, Washington, D.C. 20231, and to the Office of Management and Budget, Paperwork Reduction Project, (0651-0011), Washington, D.C. 20503

FORM PTO-1595
ATTACHMENT

1. Name of Conveying Parties – Continued – ALL INDIVIDUALS

Walter L. Johnston, Jr.
3520 Pinehurst Drive
Plano, TX 75075
Citizenship: United States of America

Guy B. Irving
2017 Crestside Drive
Carrollton, TX 75007
Citizenship: United States of America

David m. Kirkeby
1266 Candlewood Drive
Fullerton, CA 92833
Citizenship: United States of America

Walter R. Otto
907 Gina Court
Upland, CA 91784
Citizenship: United States of America

ASSIGNMENT

WHEREAS, I, one of the undersigned joint inventors, of residence as listed, having invented certain new and useful improvements as below entitled, for which application for United States Letters Patent is made, said application having been executed on the date set forth below; and

WHEREAS, RocketLogix, Inc. (hereinafter referred to as "Assignee"), a Delaware Corporation, with an address of 5956 Sherry Lane, Dallas, Texas 75225, desires to acquire my entire right, title and interest in and to the invention, and in and to the said application and any Letters Patent that may issue thereon;

NOW, THEREFORE, for and in consideration of One Dollar (\$1.00) and other good and valuable consideration, the receipt and sufficiency of which is hereby acknowledged, we assign to Assignee, all right, title and interest in and to said invention and in and to said application and all patents which may be granted therefor, and all divisions, reissues, continuations, continuations-in-part and extensions thereof; and we hereby authorize and request the Commissioner of Patents and Trademarks to issue all patents for said invention, or patents resulting therefrom, insofar as our interest is concerned, to Assignee.

We also assign to Assignee, all right, title and interest to the invention disclosed in said application throughout the world, including the right to file applications and obtain patents, utility models, industrial models and designs for said invention in its own name throughout the world including all rights to publish cautionary notices reserving ownership of said invention and all rights to register said invention in appropriate registries; and we further agree to execute any and all powers of attorney, applications, assignments, declarations, affidavits, and any other papers in connection therewith necessary to perfect such right, title and interest in Assignee.

We will communicate to Assignee any facts known to us respecting any improvements; and, at the expense of Assignee, we will testify in any legal proceedings, sign all lawful papers, execute all divisional, continuation, continuation-in-part, reissue and substitute applications, make lawful oaths and declarations, and generally do everything possible to vest title in Assignee and to aid Assignee to obtain and enforce proper protection for said invention in all countries.

ATTORNEY DOCKET NO.
067856.0110


ASSIGNMENT

2

This Assignment shall be binding on the parties' successors, assigns and legal representatives.

Title of Invention: DATA I/O MANAGEMENT SYSTEM AND METHOD

Signature of Inventor:



Inventor's Name:
Residence (City, County, State)

Christopher G. Hipp
Dallas (Dallas), Texas 75214


Date Assignment executed:

7.20.00

Date Application executed:

7.20.00

Signature of Inventor:



Inventor's Name:
Residence (City, County, State)

Walter L. Johnston, Jr.
Plano (Collin), Texas 75075


Date Assignment executed:

7/20/00

Date Application executed:

7/20/00

Signature of Inventor:



Inventor's Name:
Residence (City, County, State)

Guy B. Irving
Carrollton (Denton), Texas 75007

Date Assignment executed:

7/20/00

Date Application executed:


7/20/00

ATTORNEY DOCKET NO.
067856.0110

ASSIGNMENT

3

Signature of Inventor:



Inventor's Name:
Residence (City, County, State)

David M. Kirkeby
Fullerton (Orange), CA 92833

Date Assignment executed:

July 20, 2000

Date Application executed:

July 20, 2000

Signature of Inventor:



Inventor's Name:
Residence (City, County, State)

Walter R. Otto
Upland (San Bernardino), CA 91784

Date Assignment executed:

7/20/2000

Date Application executed:

7/20/2000


DAL01:538779.1

BAKER BOTTS L.L.P.ATTORNEYS AT LAW
800 Trammell Crow Center
2001 Ross Avenue
Dallas, Texas 75201INQUIRIES: (214) 953-6500
TAXPAYER I.D. #74-1195457

Invoice No.	Date	Voucher	Gross Amount	Discount	Net Amount
I0048973	07/20/2000	067586.0110/Assignment Recd. 746554	40.00	0.00	40.00
Check No. 104269		Check Date 07/20/2000		Vendor No. 11135	
Vendor Name COMMISSIONER OF PATENTS AND				Total Amount 40.00	

Bank of America - Dallas
Dallas, Texas**BAKER BOTTS L.L.P.**ATTORNEYS AT LAW
Dallas Operating AccountCHECK # 104269
DATE 07/20/200035-2
1130

\$ *****40.00

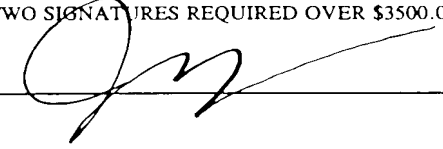PAY FORTY AND 00/100 DollarsTO THE ORDER OF
COMMISSIONER OF PATENTS AND
TRADEMARKSNOT NEGOTIABLE SIX MONTHS
FROM THE DATE OF ISSUE
TWO SIGNATURES REQUIRED OVER \$3500.00

⑈ 104 269 ⑈ ⑆ 113000023⑆ ⑈004140002895⑈

PATENT APPLICATION

TRANSMITTAL FOR U.S. PATENT APPLICATION
UNDER 37 CFR §1.53(b)

Box Patent Application
ASSISTANT COMMISSIONER
OF PATENTS
Washington, D.C. 20231
Sir:

Attorney's Docket: 067856.0110

Transmitted herewith for filing is the original patent application of:

Inventor: HIPP, et al.

For: DATA I/O MANAGEMENT SYSTEM AND METHOD

Enclosed are: Specification, Claims and Abstract (69 Total Pages)

Nine sheets of Formal Drawings


Declaration and Power of Attorney

An Assignment of the invention to RocketLogix, Inc. is attached. A
separate cover sheet in compliance with 37 C.F.R. § 3.28 and § 3.31 is included with
an Assignment recordal fee of \$40.00 pursuant to 37 C.F.R. § 1.21(h).

FEE CALCULATION					FEE
	Number		Number Extra	Rate	Basic Fee \$345.00
Total Claims	33	-20	13	X \$ 9 =	117.00
Independent Claims	4	- 3	1	X \$39 =	39.00
TOTAL FILING FEE =					\$501.00

Enclosed is a check in the amount of \$501.00 for filing fee. Please charge any
additional fees or credit any overpayment to Deposit Account No. 02-0384 of Baker
Botts L.L.P. A duplicate copy of this sheet is enclosed.

BAKER BOTTS L.L.P.
Attorneys for Applicant

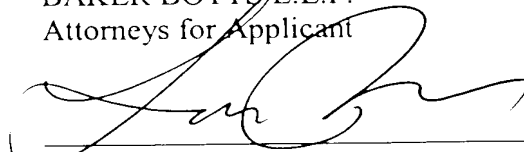

Luke K. Pedersen
Registration No 45,003

Date: July 20, 2000


BAKER BOTTS L.L.P.ATTORNEYS AT LAW
800 Trammell Crow Center
2001 Ross Avenue
Dallas, Texas 75201INQUIRIES: (214) 953-6500
TAXPAYER I.D. #74-1195457

Invoice No.	Date	Voucher	Gross Amount	Discount	Net Amount
I0048972	07/20/2000	067856.0110/Patent Application 746559	501.00	0.00	501.00
Check No. 104265		Check Date 07/20/2000		Vendor No. 11135	
Vendor Name COMMISSIONER OF PATENTS AND				Total Amount 501.00	

Bank of America - Dallas
Dallas, Texas**BAKER BOTTS L.L.P.**ATTORNEYS AT LAW
Dallas Operating AccountCHECK # 104265
DATE 07/20/200035-2
1130

\$ *****501.00

PAY FIVE HUNDRED ONE AND 00/100 Dollars

TO
THE
ORDER
OF
COMMISSIONER OF PATENTS AND
TRADEMARKSNOT NEGOTIABLE SIX MONTHS
FROM THE DATE OF ISSUE
TWO SIGNATURES REQUIRED OVER \$3500.00

⑈ 104265⑈ ⑆ 113000023⑆ ⑈004140002895⑈

DATA I/O MANAGEMENT SYSTEM AND METHOD

5 RELATED APPLICATIONS

The present application is related to co-pending U.S. Patent Applications: serial number _____, entitled *Single Board Web Server System and Method*, filed July 20, 2000 (Attorney Docket 067856.0103); serial
10 number _____, entitled *Web Server Network System and Method*, filed July 20, 2000 (Attorney Docket 067856.0104); serial number _____, entitled *Data I/O System and Method*, filed July 20, 2000 (Attorney Docket 067856.0105); serial number _____,
15 entitled *Passive Midplane System and Method*, filed July 20, 2000 (Attorney Docket 067856.0106); and serial number _____, entitled *High Density Web Server Chassis System and Method*, filed July 20, 2000 (Attorney Docket 067856.0107).

20

TECHNICAL FIELD OF THE INVENTION

The present invention relates generally to the field of network servers and, more particularly to a data input/output management system and method.

25

BACKGROUND OF THE INVENTION

A critical component of both private intranets and the publicly accessible internet is what is commonly referred to as a web server. A web server is typically a computer, which is capable of receiving requests for information and returning data or performing specialized processing upon the receipt of a network request for such processing. Conventional network architectures envision servers as large scale computing platforms. For example, large commercial entities may include very large systems acting as web servers fielding requests for processing. Alternatively, these entities might employ large parallel server operations where a multitude of individual server computers all service requests for information and processing in parallel.

In today's network architectures, smaller users such as individuals or small businesses that require server systems will typically be forced to share part of the processing capability of one of these large scale systems. In many cases this sharing of resources does not provide adequate processing capability for the individual or small business user. Further, the sharing of a large processing system means that all parties utilizing that server processing capability are vulnerable to the failure of that system. These large processing platforms are also more difficult to customize if one small user needs specific features or components that other small users do not need. Further, as Internet and intranet traffic have grown, it has become apparent that even the largest processing platforms reach a limit to their processing capability especially in light of the

increased traffic in large multimedia content and the necessity for real time processing of transactions.

Another difficulty in providing server technology to individual or small business users is associated with the difficulties in maintaining provisioning and administrating the server technology. Conventional server systems are typically very complex to administer. Software development efforts have not focused on providing simple user interfaces because the typical personnel that are tasked with maintaining servers are typically very sophisticated network technicians.

Large scale servers that are shared by multiple small users present difficulties in monitoring and metering traffic for individual users. For example, if a server provider desired to bill a user of a large scale system according to the processing time or the transaction count that occurred relative to that particular user, it is very difficult to arrive at an accurate assessment of that activity when the server hardware is shared by that user and many other users.

In the past, it has been difficult to provide server capability close to the end user. This is in large part because the typical larger server architectures require special environmental conditions and special hardware environments to supply power and large bandwidth communication links. The environment of a telephone company's central office is typically very close to the end user, however, the space power and environmental constraints within these facilities make it completely impractical to co-locate large server platforms within these facilities.

SUMMARY OF THE INVENTION

The present invention provides a data I/O management system and method that substantially eliminates or reduces the problems and disadvantages associated with previous methods and systems. In particular, a network interface card with an associated single board computer is provided wherein the network interface card is operable to consolidate and manage data communications therethrough.

In accordance with a particular embodiment of the present invention, a network interface card including a first printed circuit board is provided. First and second connectors may be coupled with the first printed circuit board and a plurality of Ethernet communication links may form at least a portion of the coupling between the first and second connectors. The first connector may be configured to receive a third connector associated with a midplane. A chip may be coupled with the first printed circuit board wherein the plurality of Ethernet communication links couple the first connector with the chip. A second communication link may also be provided which couples the chip and the second connector. In accordance with one embodiment, the chip consolidates data received through the first connector for distribution of the data to the second connector. A single board computer may also be coupled with the first printed circuit board, wherein a third communication link couples the chip with the single board computer.

In accordance with another embodiment of the present invention, a third connector may be coupled with the first printed circuit board, wherein the plurality of

Ethernet links form at least a portion of the coupling between the third connector and the chip.

5 In accordance with yet another embodiment of the present invention the third connector may be operable to distribute data between the single board computer and a management network.

10 In accordance with still another embodiment of the present invention, the single board computer may include a second printed circuit board coupled with the first printed circuit board. A central processing unit and a dynamic memory integrated circuit may also be coupled with the second printed circuit board.

15 Technical advantages of the present invention include a network interface card operable to consolidate and manage data communications received from a plurality of web server processing cards.

20 The network interface card provides a single point of data communications simplifying troubleshooting, operations, administration, management, provisioning and traffic metering and measurement regarding the web server processing cards.

25 Another technical advantage of the present invention includes providing a network interface card which includes plug and play capability within a midplane.

Yet another technical advantage of the present invention includes providing a network interface card which is hot-swappable within a midplane.

30 Other technical advantages will be readily apparent to one skilled in the art from the following figures, description, and claims.

BRIEF DESCRIPTION OF THE DRAWINGS

For a more complete understanding of the present invention and its advantages, reference is now made to the following description, taken in conjunction with the accompanying drawings, in which:

FIGURE 1 is a schematic drawing illustrating a plurality of web server processing cards coupled with a public network, a private network, and a management network, in accordance with one embodiment of the present invention;

FIGURE 2 is a plan view taken from above, with portions broken away, illustrating a web server processing card;

FIGURE 3 is a plan view taken from below, with portions broken away, illustrating the web server processing card of FIGURE 2;

FIGURE 4 is a plan view taken from above, illustrating a network interface card in accordance with one embodiment of the present invention;

FIGURE 5 is a plan view taken from above with portions broken away, illustrating an alternative embodiment network interface;

FIGURE 6 is a plan view taken from above, illustrating another alternative embodiment network interface card;

FIGURE 7 is a plan view taken from above, illustrating yet another alternative embodiment network interface card;

FIGURE 8 is an elevation view illustrating a front portion of a passive midplane, in accordance with one embodiment of the present invention;

FIGURE 9 is an elevation view, illustrating a rear portion of the passive midplane of FIGURE 8;

FIGURE 10 is an isometric view, with portions broken away, illustrating a server chassis, in accordance with one embodiment of the present invention;

FIGURE 11 is an isometric view, with portions broken away, illustrating additional components of the web server chassis of FIGURE 10;

FIGURE 12 is an isometric view, with portions broken away, illustrating additional components of the web server chassis of FIGURE 10; and

FIGURE 13 is an isometric view, illustrating a web server rack, in accordance with one embodiment of the present invention.

DETAILED DESCRIPTION OF THE DRAWINGS

Referring to FIGURE 1, a high density, multiple server network of the present invention is illustrated and generally designated by the reference number 30. Network 30 includes a plurality of web server processing cards 32 and 132-135 coupled with a public network 45, a private network 46 and a management network 47. Each web server processing card 32 and 132-135 are configured and function similarly. Therefore, web server processing card 32 will be described in detail, for illustrative purposes. However, all web server processing cards described within this specification may include all components and functionality described with regard to web server processing card 32.

Web server processing card 32 provides the functionality of a single board computer which may be employed as a rack mounted web server. Networks 45, 46 and 47 may be configured, maintained and operated independently of one another, and cooperate to provide distributed functionality of network 30.

Each web server processing card 32 is coupled with a passive midplane 34 which is coupled with a base 36 of a server chassis 38. Additional components regarding web server chassis 38 are illustrated and described with respect to FIGURE 10. A network interface card 40 couples passive midplane 34, and therefore web server processing cards 32 with a public network switch 42, via communication links 44. Throughout this specification, the term "switch" may be used to indicate any switch, router, bridge, hub or other data/communication transfer point. Public switch 42 distributes data between web server processing cards 32 and public network 45. In a

particular embodiment, public network 45 may include the Internet. Public network 45 may include a variety of networks including, without limitation, local area networks (LANs), wide area networks (WANs), and/or
5 Metropolitan Area Networks (MANs).

A second network interface card 48 is coupled with passive midplane 34 and distributes data to a private network switch 50 via communication link 52. A plurality of private network applications including a storage
10 server 54, application server 56, database server 58, and legacy systems 60 are coupled with private network switch 50 through communication links 62, 63, 64 and 65, respectively.

A management network interface 49, which is
15 illustrated in more detail in FIGURE 7, distributes data between passive midplane 34 and remote management system 70 of management network 47, through communication link 71. One or more online/nearline memory storage devices, including non-volatile storage device 72 and secondary
20 non-volatile storage device 74 communicate with management console 70 using communication links 76 and 78, respectively. Memory storage devices 72 and 74 communicate with one another through communication link
80.

25

PUBLIC NETWORK

In the illustrated embodiment public network switch 42 includes a Cisco Catalyst 5500, an industry standard Ethernet switch. Alternatively, a Black Diamond public switch, as manufactured by Extreme Networks may be provided as public switch 42.

A high density connector 43 may be coupled with public switch 42 to facilitate communication between public switch 42 and communications link 44. In one embodiment, high density connector 43 may include an RJ-21 high density telco (telephone company) type connector for consolidating at least twelve 10/100/1000 megabits per second Ethernet connections through a single cable. The use of high density telco style connectors, like high density connector 43 allows the consolidation of twelve, twenty-four or forty-eight Ethernet connections, at a twelve to one ratio, through a single cable.

Communication link 44 is operable to provide gigabit Ethernet over fiber. In another embodiment, communication link 44 may include gigabit Ethernet over copper. The coupling between public switch 42 and network interface card 40 may be accomplished using a single communication link 44. However, in another embodiment a second communication link 44 may be provided to accomplish a redundant configuration. This allows a back-up communication link between public switch 42 and network interface card 40, in case of failure of the primary communication link. Accordingly, redundant fiber connections to public switch 42 or other high density data center switches capable of aggregating hundreds of gigabit connections in a single switch 42, are provided.

Public switch 42 is coupled with public network 45 over communications link 51. In a particular embodiment, communication link 51 may include a high bandwidth transport, for example and without limitation T3 or OC48, in order to serve a plurality of servers on an internet service provider (ISP) or application service provider (ASP) network.

PRIVATE NETWORK

Similar to public network switch 42, private network switch 50 may also include either a Catalyst 5500, as manufactured by Cisco, or a Black Diamond, as manufactured by Extreme Networks. A high density connector 53 may be provided to facilitate communication between private network switch 50 and communications link 52, and ultimately, network interface card 48. In a particular embodiment, high density connector 53 may include an RJ-21 high density telco type connector for consolidating at least twelve 10/100/1000 megabits per second Ethernet connections through a single cable. As previously described, the use of high density telco style connectors, like high density connector 53 allows the consolidation of twelve, twenty-four or forty-eight Ethernet connections at a twelve to one ratio, through a single cable.

High density connectors, for example 43 and 53, facilitate the consolidation of 10/100/1000 megabits per second Ethernet cabling for large numbers of web server processing cards. Accordingly, private switch network switch 50 is cable of aggregating forty-eight or more 10/100/1000 megabits per second Ethernet ports in a single network interface card, and seven hundred sixty-eight ports (web server processing cards) in a single private network switch.

Private network switch 50 is coupled with a plurality of "back office" network applications including storage server 54, applications server 56, database server 58 and legacy systems 60. Storage server 54 provides mass storage to support web server processing cards of various users. This is a private connection

because server 54 is not linked directly to public network 45. Throughout this specification, "back office" will be used to indicate operations, management and support tasks used to support the operation of web server processing cards, which are accomplished at remote locations from server chassis 38. Communication links 62-65 provide private 10/100/1000 megabits per second Ethernet supporting various high volume business transaction processing systems (HVBTPS). Storage server 54 provides network attached storage (NAS). Application server 56 may be rented, or provided by an application service provider (ASP). Database server 58 provides transaction processing, and legacy systems 60 may include various database servers, etc. . .

Private network 46 is considered "private," because there is no physical connection between private network 46 and public network 45. Accordingly, security is provided to data and communications of private network 46 because private network 46 is protected from a security breach initiated from public network 45.

Private network 46 may be configured to provide a plurality of "back-end" network applications. For example, private network 46 may provide end users with secure internet voicemail, internet fax, a "personal" web server, electronic mail accounts, MP-3 servers and/or digital photo collection servers.

In another embodiment, private network 46 may be configured to provide groupware and other associated applications. For example, private network 46 may include the necessary hardware and software to provide users of network 30 with "chat rooms" and other on-line meeting applications. Wireless Application Protocols

(WAPs) applications may also be provided. In fact, the WAP applications may be synchronized to groupware associated with the web server processing cards.

MANAGEMENT NETWORK

Remote management system 70 of management network 47 includes the ability to monitor, manage, back-up, restore, activate and operate many of the components of high density server network 30. For example, an operator of a remote management system 70 can control all of the functions and operations of web server processing cards 32. In fact, remote management system 70 includes control software and other applications which accomplish these functions and operations automatically, without operator intervention. Many of the software and other applications which may reside upon remote management system 70 will be described later, in more detail.

In a particular embodiment, remote management system 70 performs metering, including without limitation packet level metering, and bandwidth monitoring of web server processing cards 32. Other characteristics and measurements which remote management system 70 collects, evaluates and stores include operating data and other information regarding web server processing cards 32.

Remote management system 70 identifies each web server processing card 32 according to at least two identifiers. For example, during start-up of each web server processing card 32, remote management system 70 is informed of a hardware address associated with each web server processing card 32. The hardware address is analogous to the IP address assigned by the server to each client, in a client/server network system. The hardware address of each web server processing card 32 may be referred to as the "logical" address of a particular web server processing card.

Also during the startup of web server processing cards 32, remote management system 70 is informed of a chassis/slot address identifier unique to each web server processing card 32. The chassis/slot address may also be referred to as the physical identifier, or physical address of a particular web server processing card. The physical address allows remote management system 70 to identify a particular web server processing card 32 in a manner which is more readily identifiable to an operator of remote management system 70 or other user of server network 30.

Remote management system 70, non-volatile storage device 72 and secondary non-volatile storage device 74 also provide in-line/near-line storage support for web server processing cards 32. Storage devices 72 and 74 may include high capacity redundant array of inexpensive disks (RAID)/optical/tape subsystem controlled by hierarchical storage management software which enables automatic back-up and restoration of user data from all servers via remote management system 70.

Remote management system 70 has the ability to provide a single point of management for thousands of servers. The servers under the control of remote management system 70 may include thousands of web server processing cards 32. These servers may be configured to provide individual server capacity. In another embodiment, the servers may be "clustered." In other words a plurality of web server processing cards 32 may be joined logically in order to provide a scaled level of service to a user.

Accordingly, remote management system 70 provides management functionality over a private, back end

network, which may include thousands of web servers. In a particular embodiment, software associated with remote management system 70 may be installed upon a high capacity Linux server or workstation with enough storage capacity to provide back-up functionality to all servers on any particular network.

Management software, applications and functionality associated with remote management system 70 typically reside on a server. However, remote management system 70 may be accessed remotely by various electronic devices including laptops, desktops and handheld personal digital assistants ("PDAs"). Devices used to access remote management system 70 may also include a secure web browser or other security applications.

A web browser based, graphical user interface 69 associated with remote management system 70 provides the operator of management network 47 with a user-friendly, easy to read overview of operational functions in graphical formats, suitable for "at a glance" monitoring and diagnosis.

As will be described later in more detail, remote management system 70 includes various software, applications and functionality which simplify and improve the operation of associated web servers, including without limitation web server processing cards 32. For example, remote management system 70 provides "automated preemptive failover" functionality. Automated preemptive failover includes an automated system which monitors and predicts component failures, issues notification to the network operator or administrator and initiates fail-over to a "warm spare" before catastrophic failures occur, without much, if any user intervention.

Remote management system 70, along with storage devices 72 and 74 provide automated back-up of client data for automated restoration of a web server processing card, or a spare web server processing card to its original state, in the event of a failure.

In a particular embodiment, a software agent residing upon remote management system 70 may be used to collect, store, and analyze measurements and data regarding hardware, software and bandwidth usage measurements for billing purposes. These measurements and data may be exported to a variety of applications including data mining and decision support systems.

Remote management system 70 provides the functionality of a browser-based user administrative graphical user interface. This includes an intuitive user interface for controlling basic functionality of servers on a single server level. Accordingly, a network operator or administrator may add, delete, configure or modify virtual servers and/or web server processing cards 32. Similarly, remote management system 70 may be used to add, delete, configure and modify users who are granted access to web server processing cards 32 of public network 45. Remote management system 70 also provides operations, administration, management and provisioning (OAM&P) functionality to the network administrator. Traffic metering and measurement (TM&M) and performance measurements are also collected, stored, analyzed and maintained by remote management system 70.

Similar to private network 46, management network 47 is considered a "private" network. Since there is no physical connection between management network 47 and

public network 45, management network 47 is protected
from a security breach initiated from public network 45.

WEB SERVER PROCESSING CARDS

Referring now to FIGURES 1-3, web server processing card 32 will be described in more detail. Web server processing card 32 is a single board computer upon which all of the requisite components and devices are mounted to enable processing card 32 to function and operate as a server hosting a wide array of Internet-based applications. Each web server processing card 32 within a particular chassis 38, share a common passive midplane 34 through which all power and connectivity passes. Server chassis 38 is intended for rack mount in server rack 39 (See FIGURE 13), and includes passive midplane 34 and all the associated web server processing cards 32.

In one embodiment, web server processing card 32 includes a powerful computer connected to the Internet and operable to store audio, video, data graphics and/or text files in order to display to a user of public network 46 via protocols including, without limitation, hypertext transfer protocol (http). Each web server processing card 32 includes a printed circuit board 82, coupled with a central processing unit (CPU) 84, a disk drive 86, a dynamic memory integrated circuit 88, and network interface integrated circuitry 90-92.

Central processing unit 84 performs the logic, computational and decision making functions of processing card 32. Many types of central processing units with various specifications may be used within the teachings of the present invention. In the illustrated embodiment, CPU 84 includes a Crusoe 667 MHz CPU, as manufactured by Transmeta. In fact, many central processing units with comparable processing power to a 500 MHz, Pentium III, as manufactured by Intel, may be used within the teachings

of the present invention. For example, the Crusoe TM 3200 with speeds in the range of 300-400 MHz, or TM 5400 with speeds in the range of 500-700 MHz, may also be used.

5 The clock speed of central processing unit 84 will depend in part upon the operating system resident upon web server processing card 32. In the illustrated embodiment, web server processing card 32 includes a version of the Linux operating system. The clock speed
10 of central processing unit 84 may diminish by as much as twenty percent if a version of the Windows operating system is substituted for the Linux operating system.

 CPU 84 of the present invention may include the ability to adapt its processing speed to the processing
15 load placed upon it. In other words, CPU 84 may vary its speed as appropriate to handle any given processing load, whereas many other processors simply include ON or OFF capabilities. The CPU of the present invention preferably includes a maximum continuous power
20 consumption of no more than 4.5 watts, and a maximum operating temperature of below 150 degrees Fahrenheit.

 In the illustrated embodiment, the maximum operating temperature of CPU 84 is approximately 120° Fahrenheit. Due to its variable speed feature CPU 84 of the present
25 invention will typically consume significantly less than 4.5 watts of power. CPU 84 of the illustrated embodiment is compatible with the Intel instruction set such that CPU 84 supports standard X86 operating system.

 Disk drive 86 includes electronics, motors, and
30 other devices operable to store (write) and retrieve (read) data on a disk. In the illustrated embodiment, disk drive 86 includes a two and one-half inch IBM 9.5mm

notebook hard drive. A second two and one-half inch disk drive 87 may be installed upon a given web server processing card 32. The use of disk drive 87 is optional, and increases the capacity and functionality of web server processing card 32.

A plurality of hardware connectors 97 are provided upon printed circuit board 82, to allow for the installation of up to two, two and one-half inch disk drives. For example, communications ports 95 are affixed to printed circuit board 82, to allow for the installation of disk drives 86 and/or 87. Each disk drive 86 and 87 is also affixed to printed circuit board 82, using connectors 97.

The use of web server processing card 32 having two, two and one-half inch disk drives allows for the installation of three hundred and thirty-six servers within an industry standard rack having 42U of usable interior space (standard industry rack). For purposes of this specification, a standard industry rack has the approximate dimensions nineteen inches wide by six feet high by thirty to thirty-four inches deep.

Furthermore, at least two, 6 to 25 gigabyte - two and one-half inch hard drives may be provided with web server processing card 32, in accordance with the teachings of the present invention. Alternatively, a 10 to 75 gigabyte, three and one-half inch hard drive may be installed upon web server processing card 32, in lieu of two and one-half inch drives 86 and 87. Many other hard drives are suitable for use within the teachings of the present invention. In fact, many hard drives having a maximum operating temperature of 125 degrees Fahrenheit and a maximum continuous power output of 2.5 watts may be

substituted for disk drive 86 of the present invention. Accordingly, a plurality of configurations for web server processing cards 32 are envisioned within the teachings of the present invention.

5 In another embodiment, each web server processing card 32 is equipped with a single, three and one-half inch disk drive, which offers greater spindle speed and product life. Alternatively, two and one-half inch disk drives provide greater density and lower power
10 requirements. In a particular embodiment, the three and one-half inch disk drive may include an IBM DeskStar or the two and one-half inch disk drives may include an IBM TravelStar hard drive. A total of one hundred and sixty-eight web server processing cards having a three and one-
15 half inch disk drive may be mounted in a standard industry rack. In a particular embodiment, for efficiency purposes, each web server processing card may be based upon the same motherboard design, regardless of the number and size of the associated disk drives
20 provided with the web server processing card.

Web server processing card 32 also includes a dynamic memory integrated circuit, or memory 88. Memory 88 includes a dual in-line memory module ("DIMM"), to provide the appropriate speed and bandwidth for network
25 communication. In a particular embodiment, memory 88 includes a one hundred and sixty-eight pin connector. The storage capacity of memory 88 may be approximately 64 MB RAM, or greater.

Three interface integrated circuit chip sets 90, 91
30 and 92 are coupled with printed circuit board 82. Chip set 90 may be referred to as public network interface integrated circuit since it corresponds with the

operation of the public network. Similarly, chip set 91 may be referred to as the private network interface integrated circuit and chip set 92 may be referred to as the management network interface integrated circuit since they correspond to the private network and management network operations, respectively. Collectively, chip sets 90, 91 and 92 provide three 10/100/1000 megabits per second Ethernet network interfaces. Additional chip sets may be included with web server processing card 32 in order to support more than three independent networks.

Chip sets 90, 91, and 92 include "auto sensing" capability from ten megabytes and higher, such that they may operate anywhere within the range of 10/100 Ethernet to gigabit Ethernet. Accordingly, each web server processing card 32 may come equipped with three, 10/100 BaseT network interfaces, one to support public network 45, one to support private network 46, and one to support management network 47. Each chip set 90, 91 and 92 also includes "boot from LAN" capability. Wake on LAN refers to the ability of a chipset which is not experiencing network traffic to remain idle until a request and/or traffic is received from the associated network. This feature significantly reduces the power consumption associated with chipsets 90, 91 and 92, and ultimately web server processing card 32.

A high density, 80 pin SCA connector 94 is used to couple web server processing card 32 with a corresponding high density, 80 pin SCA connector 276 associated with passive midplane 276 (see FIGURE 8). Connector 94 includes a "blind mate" feature which provides self-alignment properties for simplified installation and removal of processing card 32 from passive midplane 34.

Connectors 94 and 276 also include built-in serial connectors for managing network traffic. In other words, connector 94 and 276 are appropriately sized and configured to accommodate a serial connection independent of the above referenced Ethernet connections and any other required power/communications ports.

The installation and removal of web server processing card 32 from passive midplane 34 may be accomplished using ejector levers 96. Levers 96 facilitate zero force insertion of connector 94 within connector 276. The proper mechanical connection between connectors 94 and 276 may be verified by an operator of network 30, using the relative location and orientation of ejector levers 96.

Status and operation module 102 provides a user interface for determining the status and configuring web server processing cards 32. A plurality of LED indicator lights 104-108 are included with status and operation module 102. LED 104 indicates pass/fail, LED 105 indicates hard disk activity and LEDs 106-108 each indicate activity regarding an associated LAN. Server reset button 112 is also coupled with status and operation module 102, and may be used to accomplish a "hard" local reset of the associated processing card 32. A password reset button 114 is provided upon status and operation module 102 and may be used to locally reset the administrative password. In other words, password reset button 114 may be used to erase the existing administrative password such that an operator of network 30 may redefine the administrative password.

A dual in-line memory module (DIMM) connector 93 is also provided upon web server processing card 32. In the

illustrated embodiment, DIMM connector 93 includes a multiple pin connector. The size and configuration of DIMM connector 93 may be significantly altered, within the teaching of the present invention. DIMM connector 93 facilitates the installation of a dual in-line memory module(s) DIMM(s). Accordingly, web server processing card 32 can accommodate significantly more bandwidth than traditional systems which incorporate a single in-line memory module (SIMM).

Web server processing card 32 also includes a custom Basic Input/Output System ("BIOS") which contains the appropriate instructions for sending information from a program to the appropriate hardware device within network 30. The BIOS of the illustrated embodiment is capable of supporting at least three independent networks, i.e., public network 45, private network 46, and management network 47. The BIOS is also configured to support the "wake on LAN" capability described above. Many of the other components of web server processing card 32 are similar in structure and function to a typical motherboard, although support for video, keyboard and a mouse may be removed. Each web server processing card 32 may include two megabytes of flash read-only-memory (ROM) for BIOS storage.

Each web server processing card 32 includes the appropriate hardware and software to facilitate plug-n-play capability for web server processing cards 32. All of the components necessary for the operation of a web server processing card 32 are mounted upon a single printed circuit board. Accordingly, an unsophisticated user or operator of network 30 may install, remove and/or replace a web server processing card in a single step.

In a particular embodiment, each web server processing card 32 may include a battery backed-up real time clock.

5 In the illustrated embodiment, each web server processing card 32 is configured to operate at "low power." In this context, low power refers to a web server processing having a performance standard exceeding 0.5 BIPS/WATTS.

10 As described above, web server processing card 32 may include a three and one-half inch disk drive, in lieu of disk drives 86 and 87. Accordingly, printed circuit board 82 includes the appropriate hardware to accommodate the three and one-half inch drive. For example, a plurality of connectors 98 are provided to accommodate a
15 three and one-half inch disk drive. Also, a communications port 99 is provided to facilitate the incorporation of the three and one-half inch disk drive. These "future" connectors are optional, as web server processing card 32 may be provided without appropriate
20 connectors to accommodate the three and one-half inch disk drive.

Printed circuit board 82 includes printed circuitry operable to detect the location and presence of any disk drive(s) installed upon printed circuit board 82. For
25 example, web server processing card 32 includes three communications ports 95(x2) and 99. When one or more disk drives are installed in communications ports 95 and/or 99, printed circuit board 82 automatically detects the presence and exact port location of the disk drives.
30 This allows web server processing card 32 to route data/communications traffic according to the specific configuration of disk drive(s) present.

As previously described, each web server processing card may have either a three and one-half inch disk drive installed, a two and one-half disk drive, or two, two and one-half inch disk drives installed. Standard three and one-half inch disk drives use primarily 12 volt power and standard two and one-half inch disk drives use 5 volt power. Accordingly, 5 and 12 volt loading by each web server processing card may be very different depending on the type and/or size of disk drives installed. In previous web servers, the variation in loading between the 5 and 12 volt supplies would have required the use of different power supplies depending on the type of disk drives installed, or the use of much larger power supplies to compensate for the wide variation in 5 and 12 volt loading. In addition, mixing web servers with two and one-half inch disk drives with web servers with three and one-half inch disk drives, in a single system, was difficult.

Web server processing cards 32 eliminate these problems by balancing to some degree the loading on the 5 and 12 volt supplies as follows:

- The input power to a CPU DC to DC converter, installed upon web server processing card 32, is 12 volts when a two and one-half inch disk drive is installed.
- The input power to the CPU DC to DC converter is 5 volts when a three and one-half inch disk drive is installed.
- The input power for the CPU DC to DC converter is controlled by a disk drive power cable and is automatically configured when the appropriate cable is installed. Accordingly, web server processing card 32 includes the ability to detect which type/size of disk

drive is installed, and change the voltage provided to the DC to DC converter, based upon the disk drive(s) present.

- This technique ensures that the power source for the CPU DC to DC converter will be properly configured because the assembly process of disk drive installation causes the DC to DC converter power source to be configured properly and no additional configuration steps are required.

NETWORK INTERFACE CARDS

Public network interface card 40 is illustrated in more detail in FIGURE 4. Each network interface card 40 may support up to twelve independent web server processing cards 32. In one embodiment, network interface card 40 may include twelve independent Ethernet communication paths 117 between a front connector 115 and rear connector 116. In this embodiment, network interface card 40 provides modular connectivity, such that an operator of network 30 may access rear connector 116 at a convenient location upon server chassis 38. Accordingly, a standard RJ-21 connector coupled with communication link 44 may be connected with rear connector 116 in order to distribute data between network interface cards 40, corresponding web server processing cards 32, and public network switch 42. In the illustrated embodiment of FIGURE 4, communication link 44 may include twelve groups of two twisted pair category 5 cable, for a total of twenty-four different Ethernet connections, or forty-eight wires total. The connection between public network switch 42 and network interface card 40 may be accomplished with high density Ethernet connectors. In another embodiment, integrated 10/100/1000 switches may be incorporated using octopus cables which "fan-out" from a high density connector to multiple RJ-45 connectors.

Rear connector 116 is appropriately sized to handle network traffic for up to twelve web server processing cards 32. Since each Ethernet communication link includes two twisted pairs, rear connector 116 is configured to receive up to forty-eight individual wires.

In another embodiment, a switched network interface card 48 may be used in lieu of network interface card 40

to establish the connection between a respective web server processing card 32 and public network switch 42. Switched network interface card 48 is illustrated in more detail in FIGURE 5. Similar to network interface card 40, switch network interface card 48 includes an eighty pin SCA connector 115, which couples network interface card 48 with passive midplane 34. Each Ethernet communication path 145 associated with switched network interface card 48 terminates at a switch chip 145. Switch chip 145 monitors and distributes traffic from a respective web server processing card 32 to a corresponding RJ-45 Ethernet connector 144 through an Ethernet communication link 143. In a particular embodiment, switch chip 145 may include an optional twelve or twenty-four port 10/100 Base T switch with fiber gigabit uplinks. In another embodiment, switch chip 145 may include an optional twelve or twenty-four port 10/100 Base T switch with copper gigabit uplinks.

A redundant configuration may also be included having a second RJ-45 connector 146 and Ethernet communication link 148. This provides the network operator with the ability to include redundant communication links 44 in separate physical locations, for emergency operation in the event of a failure of one of the communications systems.

As illustrated in FIGURE 1, private network interface card 48 may be used to establish connectivity between corresponding web server processing cards 32 and private network switch 50. In another embodiment, interface card 48 may be configured similarly to public network interface card 40. Accordingly, either the straight pass-through configuration of network interface

card 40 or the switched pass-through configuration of network interface card 48 may be used for private network interface card 48 and/or public network interface card 40.

5 The configuration and operation of an alternative embodiment network interface card 66 is illustrated in more detail in FIGURE 6. Network interface card 66 includes an eighty pin SCA connector 118 in order to couple management network interface card 66 with passive
10 mid-plane 34. Ethernet communication links 119 distribute data between a respective web-server processing card 32 and a hub chip 120. A communication link 122 provides a communication path between hub chip 120 and an RJ-45 connector 124. Accordingly,
15 communication link 71 (FIGURE 1) may be coupled with RJ-45 connector 124 in order to distribute data between management network interface card 68 and management console 70.

20 A second RJ-45 connector 126 may be coupled with hub chip 120 through a communication link 128. RJ-45 connector 126 provides the network operator with the ability to "daisy-chain" management network interface cards from a plurality of web server chassis 38. Accordingly, RJ-45 connector 126 is useful when multiple
25 web server chassis are employed in a single network, and daisy-chain ability is desired. In another embodiment, RJ-45 connector 126 may be used to provide a redundant communication path between management console 70 and interface card 68.

30 Hub chip 120 consolidates management network traffic from corresponding web server processing cards 32, for distribution throughout the network. In a particular

embodiment, hub chip 120 may include an integrated network hub, for example a sixteen port repeater chip integrated upon interface card 66 for aggregating all management communications through a single 10/100/1000
5 megabits per second Ethernet connection. Hub chip 120 may be referred to as a repeater because it broadcasts, or repeats every message it receives to all ports of the management network. In another embodiment, hub chip 120 may be replaced with a switch chip which would provide
10 the ability to address and distribute messages according to a packet header, to the appropriate port within the management network.

In a particular embodiment, a hub chip may be employed, in lieu of a switch chip, at the network
15 interface card due to its reduced cost, and simplified operation. In one embodiment, RJ-45 connectors 124, 126, 144 and 146 may include gigabit RJ-45 connectors. In another embodiment connectors 124, 126, 144 and 146 may be replaced with fiber optic or copper gigabit interface
20 connectors ("GBIC").

Referring now to FIGURE 7, management network interface 49 is illustrated in more detail. Management network interface 49 includes a single board computer 160, coupled with management network interface card 68.
25 Single board computer 160 may also be referred to as a "daughter card" to management network interface card 68. Single board computer 160 includes similar hardware and components to web server processing card 32, except single board computer 160 does not include a disk drive.
30 Conversely, web server processing card 32 includes disk drive 86.

Management network interface card 68 includes a pair of high density connectors 162 and 164. Each high density connector 162 and 164 includes at least twelve Ethernet connectors, a serial port, and a power interface. In a particular embodiment, the serial port associated with each high density connector 162 and 164 includes an I2C bus.

The power interface associated with each high density connector 162 and 164 is configured to provide 3.3, or 5.0 volt power source to management network interface 49. Accordingly, power may be distributed to various components of management network interface 49, including single board computer 160, and a hub chip 166.

The twelve Ethernet connectors, associated with each high density connector 162 and 164, enable each high density connector 162 and 164 to interface with twelve web server processing cards. Accordingly, in the illustrated embodiment, each management network interface can collect, interpret and manage communications and data transfer with twenty-four web server processing cards.

Twelve Ethernet connectors 168 are used to couple high density connector 162 with hub chip 166. Similarly, twelve Ethernet connectors 170 are used to couple high density connector 164 with hub chip 166. Hub chip 166 consolidates management network traffic from up to twenty-four web server processing cards, for distribution to single board computer 160 and/or throughout network 30. In another embodiment, a switch chip may be used in lieu of hub chip 166 in order to provide management network interface 49 with the ability to selectively switch and distribute network management information

rather than simply broadcasting all messages received to every node coupled with management network interface 49.

A communications link 172 distributes data between hub chip 166 and an Ethernet connector 174. Accordingly,
5 Ethernet connector 174 may be coupled with remote management system 70, of management network 47. In a particular embodiment, management network interface 49 may be provided without single board computer 160. In this embodiment, communication between web server
10 processing cards 32 and remote management system 70 may be conducted according to the preceding description.

In another embodiment, single board computer 160 may be provided with management network interface 49, or management network interface 49 may be upgraded in the
15 future to include single board computer 160. Accordingly, connectors 176 and 178 are typically provided upon management network interface card 48, to facilitate the installation of single board computer 160.

A communication link 182 couples hub chip 166 with
20 an Ethernet connector 184 associated with single board computer 160. Accordingly, when properly installed, single board computer 160 receives all broadcast signals which are received by hub chip 166. Single board computer 160 collects, stores, calculates, analyzes and
25 communicates this information to remote management system 70 and/or other components of high density server network 30. Communication between single board computer 160 and remote management system 70 occurs via Ethernet connector 186.

30 When single board computer 160 and its associated Ethernet connector 186 are present upon management network interface 49, Ethernet connector 174 is no longer

required to communicate with remote management system 70. However, in the event of a failure of single board computer 160 and/or its associated components, including without limitation Ethernet connector 186, Ethernet connector 174 provides an alternative path of communication between management network interface 49 and remote management console 170. In an alternative embodiment, Ethernet connector 174 may be omitted from management network interface 49.

Connectors 174 and 186 provide the network operator with the ability to "daisy-chain" management network interface 49 with a plurality of additional components of network 30, for example, additional management network interfaces associated with other server chassis 38. Accordingly, connectors 174 and 186 are useful when multiple web server chassis are employed in a single network, and daisy-chain ability is desired. In another embodiment, connectors 174 and 186 may be used to provide a redundant communication path between management console 70 and interface 49.

In the illustrated embodiment, another communications link 188 is provided in order to couple single board computer 160 and high density connector 164. Communication link 188 may include an I2C bus coupled with the serial port associated with high density connector 164. Another I2C bus may also be provided between single board computer 160 and the serial port associated with high density connector 162. As will be described later in more detail, the direct serial connection between single board computer 160 and high density connector 164 allows single board computer 160 to execute a hardware reset, software reset, or password

reset upon any particular web server processing card with which high density connector 164 is coupled.

Management network interface 40 includes the ability to perform a hardware reset of any particular web server processing card. Management network interface 40 also includes the ability to perform software resets of various components of network 30. In a particular embodiment, single board computer 160 collects telemetry data regarding the use, performance and operation of many components of each web server processing card 32, which will be described later in more detail. Such data may be stored within single board computer 160 and/or forwarded to remote management system 70, for further processing.

PASSIVE MIDPLANE

Referring now to FIGURES 8 and 9, passive midplane 34 is illustrated in more detail. On its front face 275, passive midplane 34 includes a plurality of web server processing card connectors 276 which facilitate the installation of up to twenty-four web server processing cards 32. Rear face 277 of passive midplane 34 includes a pair of power supply mounting mechanisms 278 which accommodate power supplies 280, which will be described later in more detail. Rear face 277 of passive midplane 34 also includes a plurality of network interface card connectors 282-287. In the illustrated embodiment, connectors 286 and 287 accommodate a single network interface 49.

Passive midplane 34 is considered "passive" because it includes no active components which can fail. Instead, passive midplane 34 includes the necessary wiring to connect each respective web server 32 with its corresponding network interface card. Passive midplane 34 includes a printed circuit board with the appropriate printed circuitry to distribute data and power necessary for the operation of network 30. For example, passive midplane 34 distributes power to components of web server processing cards 32 and network interface cards 40, 48 and 68. Additionally, passive midplane 34 distributes data and/or communications signals between web server processing cards 32 and network interface cards 40, 48 and 68.

Passive midplane 34 provides a high-density, hot pluggable connector for as many as twenty-four web server processing cards. It consolidates power, three separate Ethernet networks and serial connections all through a

single connector. Passive midplane 34 "auto-senses" web server processing cards and available slots, to allow automatic configuration of networks via remote management system 70.

5 Passive midplane 34 also includes a ribbon cable connector 290. Connector 290 is operable to distribute power and control signals from passive midplane 34 to articulating door 262 of chassis 38. This accommodates the operation of the LEDs and built in fans associated
10 with articulating door 262.

SERVER CHASSIS

Referring now to FIGURES 10-12, server chassis 38 is illustrated in more detail. Server chassis 38 includes a box build 260 having a base 36 forming a lower portion thereof. Box build 260, of the illustrated embodiment, is fabricated from plated steel. An articulating door 262 is coupled to box build 260. Articulating door 262 and box build 260, in combination, provide the ability to protect web server processing cards 32 and 132-142 from ambient environment.

Articulating door 262 includes a plurality of box fans 264-269, mounted therein. Box fans 264-269 draw air from the ambient environment through articulating door 262, and exhaust through a back plate 270 associated with box build 262. In the illustrated embodiment, box fans 264-269 include a bank of six, three-inch fans. It will be recognized by those of ordinary skill in the art that the number, size, and configuration of fans associated with server chassis 38 may be significantly altered within the teachings of the present invention. In a particular embodiment, each box fan 264-269 will include a tachometer output having an interface coupled with passive midplane 34 such that interruption of service of any particular fan may be promptly detected.

Articulating door 262 includes a printed circuit board 272 which allows for the viewing of LED indicator lights associated with web server processing cards 32 and 132-142, by persons standing in front of articulating door 262. Recessed windows 272 include slightly "smoked" translucent material, such that the associated LED indicator lights shall be reasonably visible through the door.

The interior of articulating door 262, which faces web server processing cards 32 and 132-142 when articulating door is in the closed position, is fabricated from a metallic material. In a particular embodiment, an RF gasket may be installed between articulating door 262 and box build 260, at their interface. An injection molded plastic bezel is attached to articulating door 262 in order to achieve a leading-edge industrial design. A pair of mounting ears 274 are installed at the edges of box build 262, to provide easy installation of server chassis 38 within server rack 39.

In the illustrated embodiment, server chassis 38 measures 17.3 inches wide (without mounting ears) by 25.5 inches deep by 5.25 inches high. The environmental operating temperature is within the approximate range of 0 to 40 degrees Celsius (32 to 104 degrees Fahrenheit). Server chassis 38 may be operated at altitudes exceeding 10,000 feet above sea level.

Server chassis 38, and the associated web server processing card connector of midplane 34 contain web server processing card connectors 276 (see FIGURE 8) which accommodate up to 24 web server processing cards. In the illustrated embodiment, web server processing card guides are installed at 0.7 inch center to center dimensions. Up to 12 web server processing cards 32, including optional three and one-half inch disk drives may be installed upon passive midplane 34 using every other web server processing card guide 276.

Server chassis 38 includes two power supply mounting mechanisms 278, which facilitate the installation of two load-balance, hot-swappable power supplies 280. Power supplies 280 are installed upon backplate 270 with

mechanical fasteners, for example, thumbscrews. No other mounting hardware is required to attach/detach power supplies 280 to/from server chassis 38. Each power supply 280 connects to passive midplane 34 using only power supply connecting mechanisms 278.

Each power supply 280 includes enough power to operate a fully populated passive midplane 34, in the event that one of the two power supplies 280 fails. Accordingly, server chassis 38 may be offered and operated using a single power supply 280, with an optional upgrade to a second power supply.

Each power supply 280 shall be designed to be compliant with the MPS SSI power supply specification. This is a publicly released specification developed by the Server System Infrastructure organization (SSI). In a particular embodiment, power supplies 280 may include power supplies as manufactured Delta Corporation (model #DPS-450CB-1B).

Power supplies 280 are load balanced and hot swappable. Passive midplane 34 includes integrated printed circuitry which distributes power and signals to components of web server processing cards 32, 132-142, and components of the associated network interface cards 40, 48 and 68. Since each power supply 280 is sized appropriately to operate an entire chassis 38, a single power supply 280 may be removed from its associated power supply mounting mechanism 276 and replaced with a new power supply, without powering OFF server chassis 38, or affecting the operation of network 30.

Power supplies 280 are considered load balanced because they include "auto sensing" capabilities. Each power supply 280 has the ability to sense the load

required of it. The printed circuitry associated with midplane 34 evenly distributes the necessary power consumption load between power supplies 280. Therefore, power supplies 280 will automatically supply one half of the necessary power (voltage) to midplane 34 when each power supply 280 is properly connected and fully operational. If service from one power supply 280 is diminished, or becomes unavailable, the other power supply 280 will sense this and supply the power necessary for passive midplane 34 to operate at full capacity. In another embodiment, power supplies 280 and midplane 34 may be provided with the printed circuitry necessary to allow power supplies 280 to communicate with one another regarding their load sharing responsibilities, and report trouble and/or diminished capacity to one another.

Power supplies 280 also include interfaces which allow management network interface card 48 and remote management system 70 to monitor voltage and temperature of each power supply 280. Accordingly, remote management system 70 includes the ability to monitor each power supply 280, and determine "trouble" situations which require intervention of the network operator or administrator. Furthermore, management network interface card 48 and remote management console 70 may use the data collected from the interface with power supplies 280 to predict an impending failure of one or more power supplies 280. Remote management console 70 may then take corrective action including without limitation, distributing the power load to another power supply 280, notifying the network administrator with a trouble alarm, and/or distributing network traffic away from the affected web server chassis 38, to another server

chassis. The latter may be accomplished by mirroring the operation of the affected server chassis using back-up data stored upon another server chassis, or private network 46.

5 Detailed power supply specifications regarding power supplies 280, of the illustrated embodiment, are indicated below, for illustrative purposed only, and not by way of limitation:

- Features

- 10
 - Meet SSI MPS Standard
 - Power factor correction >95%
 - Automatic fan speed control
 - Auto recovery after an AC power failure
 - Harmonic current meet IEC1000-3-2
 - 15
 - Low output ripple and noise
 - FanC signal meets ATX standard
 - Redundancy with active current sharing
 - Remote on/off control
 - Over voltage, over current, over temperature, and
 - 20 short-circuit protection

- Environmental

- Operating temperature: 0 C to 50 C
- Storage temperature: -40 C to 70 C
- MTBF: >100,000 hours
- 25
 - Cooling: Self-contained fan with speed control based on ambient temperature

- Electrical Specifications

- Input
 - Input range: 90-264 VAC
 - 30 Frequency: 47-63 Hz
 - Input current: 7.6A low line input at full load
 - Efficiency: >60% @ full load, nominal line

EMI/RFI FCC Part 15J Class B; VDE 243

Level B, CISPR 22 Class B

▪ Output

Maximum power: 450 watts

5 Holdup time: >20 ms @ full load, nominal line @
full load, nominal line

Rise time: <200 ms

Overvoltage protection: +3.3V, +5V, +12V, +5Vsb

Leakage current: <0.75mA

10 As previously discussed, a plurality of RJ-21 style
connectors may be mounted on backplate 270 of server
chassis 38. Additionally, up to two RJ-45 style
connectors may also be mounted on backplate 270. These
connectors are intended to facilitate daisy chaining of
15 server chassis 38 within server rack 39.

Passive midplane 34, of server chassis 38 includes
all of the power and connectivity requirements to
accommodate web server processing cards 32 and 132-142.
Furthermore, passive midplane 34 can accommodate an
20 additional twelve web server processing cards.

Server chassis 38 is referred to as "hot swappable"
because each web server processing card 32 and 232-243
may be replaced from within chassis 38 while chassis 38
is powered on. Chassis 38 may include as many as twelve
25 web server processing cards having a three and one-half
inch disk drive, or as many as twenty-four web server
processing cards having two, two and one-half inch disk
drives. In still another embodiment, web server
processing card 32 may be provided without an associated
30 disk drive.

Web server processing cards 32 each include a serial port 294 which facilitates local debugging via a laptop computer or other portable electronic device.

5 A parallel command bus associated with each web server processing card extends through the midplane and allows an operator of the network to perform a hardware reset (boot from LAN, boot from hard disk) of a targeted web server processing card and/or force a password reset. Serial port 294 also facilitates local debugging of web
10 server processing cards 32 associated with web server chassis 38. For example, when private network 46 and/or management network 47 are unable to establish proper communication with web server processing cards 32 within a given server chassis 38, a local PC may be coupled with
15 server chassis 38 in order to establish communications via serial port 294. In a particular embodiment, another serial port may be coupled directly (serially) to network management cards 40, 48 and/or 68, through passive midplane 34. Accordingly, hardware and software resets
20 and other debugging techniques may be employed to communicate with web server processing cards 32 and network interface cards 40, 48 and 68, until network communications are restored.

Each power supply 280 includes an associated built
25 in fan to facilitate airflow through, and cooling of, each power supply 280. Each fan includes variable speed capability. The fan speed can be adjusted from a constant speed, to a variable speed, temperature control setting. In a particular embodiment, the fans associated
30 with power supplies 280 are used to provide airflow, and therefore cooling to web server processing cards 32, as described below.

Articulating door 262 of chassis 38 includes a chassis intrusion sensor associated with an LED board. When articulating door 262 is opened, a circuit is closed which forces the fan to a full speed setting. Each power supply 280 includes an associated interface which allows this configuration. This is done to compensate for the loss of airflow from fans 264-269 due to articulating door 262 being opened. In this manner, additional airflow through power supplies 280 at least partially compensates for the loss of airflow through fans 264-269, and additional airflow is drawn across each web server processing card 32. When articulating door 262 is closed, the fans associated with power supplies 280, return to their previous setting.

In a particular embodiment, each server chassis 38 consumes a total of 3U (1U = 1.75 inches) of space. Accordingly, as many as fourteen server chassis 38 may be installed in an industry standard 42U rack. Each chassis 38 comes equipped with the ability to support redundant, load-balanced power supplies and RJ-21 style connectors which allow the consolidation of the requisite Ethernet cables to a significantly smaller number of cables than those required through the use of conventional RJ-45 connectors.

The teachings of the present invention may be used to provide more than three hundred and thirty-six servers in a standard six foot equipment rack (See FIGURE 13). The design and configuration of web server processing cards 32 accommodate an extremely low total cost of ownership (TCO). For example, twelve or twenty-four web server processing cards 32 which are ultra-compact, low-

power single board computers which share a common passive midplane, power and cable management system.

Server rack 39 is configured to provide a user friendly operating environment. For example, server rack
5 39 may be co-located at the physical location of an internet service provided (ISP) or an applications service provider (ASP). Moreover, due to the ease of use and operation, unsophisticated employees of the ISP/ASP can easily operate and maintain all of the components
10 associated with web server rack 39.

Web server processing cards 32 of the present invention provide a fully scalable and inexpensive alternative to much larger, commercial web servers. There is practically no limit to the amount of web server
15 processing cards any given ISP/ASP may add to their operations, as demand requires. Further, scalability is achieved at minimal increments. Network operators may add a single web server processing card, or an entire server rack including as many as three hundred and thirty
20 six individual web server processing cards, as necessary. Accordingly, multiple web server processing cards operating in parallel can be deployed to achieve equal or better performance than larger commercial servers, without the significant financial investment associated
25 with other commercial servers.

NETWORK MANAGEMENT

As previously described, management network interface card 68 and remote management system 70 include the ability to monitor and manage components of network 30. Various measurements and characteristics regarding the functionality and operation of network 30 are collected, stored, analyzed and maintained using single board computer 166 of network management card 68, and remote management system 70.

In a particular embodiment, CPU 84 includes an interface which collects and stores information regarding the operation of CPU 84. This information includes "snapshot" and historical measurements including, without limitation the CPU voltage, CPU temperature, CPU wattage, and CPU utilization. Snapshot measurements include those measurements which represent the value at a given point in time. Historical information includes measurements which have been collected over time. For example, information regarding the temperature of the CPU may include the temperature at the time of the communication, or coordinates regarding the temperature of the CPU over predetermined intervals of time.

The embedded circuitry of web server processing card 32 transfers this information through passive midplane 34 to management network interface card 68. This information is captured and stored within single board computer 160. Single board computer 160 includes the hardware and software components required to collect, store and analyze this information. Single board computer 160 may also include the ability to react to information collected. For example, single board computer 160 may be pre-programmed to power off a CPU

that exceeds a given temperature. Furthermore, single board computer 160 may instruct another component of network 30 to "back-up", or replicate to another component of network 30, all data, state information and functionality associated with a web server processing card having a CPU operating at an excessive temperature, and/or suffering from some other problematic malady. In fact, single board computer 160 may cause the "back-up" information associated with such a web server processing card to be uploaded to a spare web server processing card which can eventually take over all operations of the affected web server processing card. The identification and autonomous correction of such trouble and potential failures may be referred to as "predictive failover".

In this manner, single board computer 160 may autonomously detect a CPU which is about to fail and seamlessly transfer the operation of the CPU and its associated web server processing card to the spare web server processing card. All of these steps are possible without any user intervention. Also, all of these steps are possible without any service interruption, "downtime" or adverse affect upon the overall operations of network 30. A network operator may then be notified of the trouble situation, such that the affected web server processing card can be replaced with another spare.

In another embodiment, single board computer may transfer the information it collects to remote management system 70. Accordingly, at predetermined intervals, remote management system 70 downloads this information from single board computer 160 for further processing. Remote management console 70 may then use this information in a similar manner as single board computer

160, in order to automatically identify a potential system failure, and react accordingly, without user intervention.

5 In a similar manner, information regarding operating disk drives may be collected by single board computer 160 and/or remote management system 70. For example, single board computer 160 may collect measurements from an interface associated with disk drive 86. Information available to single board computer 160 regarding disk
10 drive 86 may include, without limitation, disk drive voltage, disk drive temperature, disk drive spindle speed, and/or disk drive utilization. Disk drive utilization may be made available according to bytes used and/or bytes available. In a particular embodiment, this
15 information may be supplied in percentages, for example, 65% used, 35% available. Single board computer 160 may also collect information regarding disk drive's 86 soft error bit rate, a measure of the soft errors over a specific period of time.

20 The operating system associated with CPU 84 also includes information which may be transferred to single board computer 160 and/or remote management system 70. For example, the operating system of web server processing card 32 collects information regarding disk
25 drive utilization (bytes used, bytes available), CPU utilization (used/available), and network traffic (megabits/second). Accordingly, web server processing card 32 may transfer this information to single board computer 160 and/or remote management system 70 for use
30 as described above.

Dynamic memory integrated circuit 88 also includes information which may be collected and analyzed by single

board computer 160 and/or remote management system 70. In a particular embodiment, dynamic memory integrated circuit 88 may include an interface which transfers this information through web server processing card 32 and
5 passive midplane 34, to single board computer 160 and/or remote management system 70. In another embodiment, this information may be obtained through the operating system. Information regarding dynamic memory integrated circuit 88 includes, without limitation the amount of memory used
10 (bytes), the amount of memory available, the percentage of memory used, and/or the percentage of memory available.

Various other measurements and characteristics regarding the operation of components of network 30 may
15 be monitored, collected, stored, calculated and analyzed in a similar manner. For example, each power supply 280 may include an interface which includes this information and makes it available to single board computer 160 and/or remote management system 70. Information
20 regarding power supplies 280 includes, without limitation, the voltage, temperature and/or fan speed associated with power supplies 280.

A temperature sensor may also be installed on or near web server processing cards 32, server chassis 38,
25 power supplies 280 and/or server rack 39. In the illustrated embodiment, each web server processing card includes an associated temperature sensor. Accordingly, the ambient temperature on or near components of web server processing cards 32 may be used to predict trouble
30 or failure of a given web server processing card 32, or component thereof. In a particular embodiment, the

temperature sensor may be located on the web server processing card side of passive midplane 34.

In a particular embodiment, single board computer 160, and/or remote management system 70 may monitor the operation of one or more box fans 264. Information
5 regarding the box fans may include, without limitation, fan speed, voltage and/or temperature.

Additional measurements and information regarding the operation of various components of network 30 include
10 the age of the component, the service life, history of trouble or failures and historical data regarding the life expectancy and previous trouble or failure associated with identical or similar components. All of these measurements and information may be collected,
15 calculated or generated by components of network 30, and/or input into management system 70 and/or single board computer 160 by the network operator/administrator.

As previously discussed, management network interface 49 may be provided without single board
20 computer 160. In this embodiment, all of the information discussed above regarding components of network 30 may be sent directly to remote management system 70. When network interface 49 is provided without single board computer 160, remote management system 70 may be
25 configured to "sample" or collect measurements and information regarding components of network 30 at less frequent intervals, than those where a single board computer 160 is provided. This will help decrease network traffic. Accordingly, any data processing,
30 collection of information, analysis and reaction to such information discussed with regard to either management network interface 49 or remote management system 70 may

be processed, collected, stored, calculated or analyzed by one, or the other, or both.

Information collected regarding measurements and characteristics of components of network 30 may be used in a variety of ways. In a particular embodiment, this type of information may be collected and stored in a database associated with network 30, for example non-volatile storage device 72 or storage server 54. This information may be used in order for the network administrator to evaluate the performance of the system and/or predict service and maintenance needs prior to failure of a given component.

In another embodiment, remote management system 70 may use this information to establish a baseline for system performance and guidelines, or parameters that determine acceptable ranges of operation for all components of network 30. In this manner, remote management system 70 can use historical data regarding previous component failures to detect potential trouble or failures in the future. In one embodiment, remote management system 70 may monitor the performance of a particular component relative to identical or similar components within network 30, in order to detect and/or predict trouble or potential failures. In a particular embodiment, remote management system 70 may employ various techniques in order to detect or predict potential failures. For example, remote management system 70 may use logistic regression and/or neural networks to detect or predict potential failures.

Once remote management system 70 determines that one or more components of network 30 are susceptible to failure due to the information collected by remote

management system 70, various actions may be taken. For example, remote management system 70 may be configured to sound an alarm or provide another form of communication to the network administrator regarding the potential failure. The identification of a component operating outside of standard, or baseline performance characteristics, which indicate potential trouble or failure, may be referred to as a "threshold trigger".

Alternatively, remote management system 70 may increase the security, or surveillance of a component that exhibits characteristics outside of the normal range. For example, remote management console may be configured to sample the CPU voltage of every CPU associated with a given server chassis, at one hour intervals. If remote management system 70 detects a CPU with a voltage outside of a predefined range, remote management system 70 may then increase the frequency of voltage measurement regarding that particular CPU. In fact, remote management console 70 may begin to monitor all components of the web server processing card which includes the affected CPU at more frequent intervals, to ensure that the performance of the web server processing card has not deteriorated due to the performance of the CPU.

Furthermore, remote management system 70 may be configured to respond to potential trouble situations in order to prevent a system failure. The active autonomous response or corrective measure to a threshold trigger by remote management system 70 and/or single board computer 160, may be referred to as a "failover event". For example, if remote management system 70 detects a temperature reading outside a predefined "normal" range

for a given web server processing card, remote management system 70 may cause another component to "back-up" all data residing on the web server processing card in order to prevent the loss of such data.

5 If remote management system 70 determines that the affected web server processing card is likely to fail, remote management system 70 may cause a "spare" web server processing card to begin operations and transfer all of the data, state information and functionality of
10 the affected web server processing card to the spare. Accordingly, once a potential failure is predicted, a seamless transfer of data, state information and operations from one web server processing card to another may be accomplished, without affecting the operation of
15 network 30, and without user intervention.

 Due to the configuration and operation of network 30, network operators, for example telephone companies, ISPs and/or ASPs may provide varying levels of disaster recovery to customers utilizing server chassis 38. In
20 one embodiment, the operator will simply receive notification of a failure of a component, and repair or replace the affected component. In another embodiment, a threshold trigger may be received, indicating trouble and/or potential failure of a component, and the operator
25 may take the corrective action necessary to continue operation of server chassis 38. In another embodiment, the operator may provide a user with predictive failover functionality, such that network 30 may detect and correct potential problems before the operation of server
30 chassis 38 is affected. In yet another embodiment, the operator may provide a customer with a mirror web server processing card such that two web server processing cards

are performing the exact same functionality, in case of the failure of one or the other. Similarly, a user may be provided with an entire "mirror" chassis to back up all of the web server cards in a particular server chassis, simultaneously.

In one embodiment, server chassis 38 may be used as a "cache farm". In other words, caching software may be provided on one or more web server processing cards which may be used as independent, or clustered caching devices.

Network 30 and all associated components are configured with minimized points of failure. Since each web server processing card includes the ability to independently detect system status information, the failure of a single web server processing card will not affect network operations.

Although the present invention has been described with several embodiments, various changes and modifications may be suggested to one of ordinary skill in the art. It is intended that the present invention encompass such changes and modifications as fall within the scope of the appended claims.

WHAT IS CLAIMED IS:

1. A network interface card, comprising:

a first printed circuit board;

5 first and second connectors coupled with the first printed circuit board;

a plurality of ethernet communication paths forming at least a portion of a coupling between the first and second connectors;

10 the first connector configured to receive a third connector associated with a midplane;

a chip coupled with the first printed circuit board wherein the plurality of ethernet communications paths couple the first connector with the chip;

15 a first communication link coupling the chip and the second connector;

wherein the chip consolidates data received through the first connector for distribution of the data to the second connector;

20 a single board computer coupled with the first printed circuit board; and

a second communication link coupling the chip with the single board computer.

25 2. The network interface card of Claim 1, further comprising:

a third connector coupled with the first printed circuit board; and

30 wherein the plurality of ethernet paths form at least a portion of the coupling between the third connector and the chip.

3. The network interface card of Claim 1, further comprising:

5 a third connector coupled with the single board computer; and

wherein the third connector is operable to distribute data between the single board computer and a management network.

10 4. The network interface card of Claim 1, further comprising a third connector forming the coupling between the single board computer and the second communication link.

15 5. The network interface card of Claim 1, wherein the single board computer comprises:

a second printed circuit board coupled with the first printed circuit board;

20 a central processing unit coupled with the second printed circuit board; and

memory integrated circuits coupled with the second printed circuit board.

25 6. The network interface card of Claim 1, wherein the chip includes a repeater chip.

7. The network interface card of Claim 1, wherein the chip includes a switch chip.

30 8. The network interface card of Claim 2, wherein the third connector includes a gigabit ethernet connector.

9. The network interface card of Claim 2, wherein the third connector includes a gigabit interface connector (GBIC).

10. A network interface card, comprising:

a first printed circuit board;

a chip coupled with the first printed circuit board;

5 first and second connectors coupled with the first printed circuit board, each of the first and second connectors adapted to receive a plurality of first ethernet communications links , through a midplane associated with a plurality of web server processing
10 cards;

a plurality of second ethernet communications links coupling the first connector and the chip;

a plurality of third ethernet communications links coupling the second connector and the chip;

15 a high density communication path coupling the chip with a third connector; and

wherein the chip is operable to distribute data communications between one of the first and second connectors, and the third connector.

20

11. The network interface card of Claim 10, wherein the chip includes a repeater chip.

25 12. The network interface card of Claim 10, wherein the chip includes a switch chip.

30 13. The network interface card of Claim 11, wherein the repeater chip includes an integrated network hub and the repeater chip is operable to aggregate all 10/100/1000 megabits per second ethernet communications received through the first and second connectors.

14. The network interface card of Claim 13, wherein the integrated network hub includes a repeater chip having at least ten ports.

5 15. The network interface card of Claim 12, wherein the switch chip includes an integrated network switch and the switch chip is operable to aggregate all 10/100/1000 megabits per second ethernet communications received through the first and second connectors.

10

16. The network interface card of Claim 15, wherein the integrated network switch includes a switch chip having at least ten ports.

15 17. The network interface card of Claim 10, further comprising:

 a fourth connector coupled with the first printed circuit board;

20 a second high density communication path coupling the repeater chip with the fourth connector; and

 wherein the second high density communication path and the fourth connector provide at least a portion of a redundant communication path between the chip and a network router.

25

18. The network interface card of Claim 10, further comprising:

a fourth connector coupled with the first printed circuit board;

5 a second high density communication path coupling the repeater chip with the fourth connector; and

wherein the fourth connector is operable to receive a fifth connector associated with a second network interface card.

10

19. The network interface card of Claim 10, wherein the third connector includes an RJ-21 connector adapted to receive a fourth connector associated with a network router.

15

20. The network interface card of Claim 12, wherein the switch chip includes a multiple port 10/100 Base T switch having fiber gigabit uplinks.

20

21. The network interface card of Claim 12, wherein the switch chip includes a multiple port 10/100 Base T switch having copper gigabit uplinks.

25

22. The network interface card of Claim 12, wherein the switch chip is operable to address and distribute messages according to packet headers including port addresses associated with network components.

30

23. The network interface card of Claim 10, wherein the first connector includes a built-in serial port.

24. The network interface card of Claim 10, further comprising:

a single board computer coupled with the first printed circuit board; and

5 a second high density communication path coupling the chip with the single board computer.

25. The network interface card of Claim 24, wherein the single board computer comprises:

10 a second printed circuit board coupled with the first printed circuit board;

a central processing unit coupled with the second printed circuit board; and

15 memory integrated circuits coupled with the second printed circuit board.

26. A method for consolidating data communications from a plurality of electronic devices, comprising:

providing a first printed circuit board;

5 coupling first and second connectors with the first printed circuit board;

providing a plurality of ethernet communication paths which form at least a portion of a coupling between the first and second connectors, wherein the first
10 connector is configured to receive a third connector associated with a midplane;

coupling a chip with the first printed circuit board wherein the plurality of ethernet communication paths couple the first connector with the chip;

15 providing a first communication link which couples the chip and the second connector;

wherein the chip consolidates data received through the first connector for distribution of the data to the second connector;

20 coupling a single board computer with the first printed circuit board;

providing a second communication link coupling the chip with the single board computer; and

25 wherein the single board computer is operable to manage data communications received by the chip.

27. The method of Claim 26, further comprising:

coupling a third connector with the first printed circuit board; and

30 wherein the plurality of ethernet paths form at least a portion of the coupling between the third connector and the chip.

28. The method of Claim 26, further comprising:
coupling a third connector with the single board
computer; and

5 wherein the third connector is operable to
distribute data between the single board computer and a
management network.

29. The method of Claim 27, further comprising
10 providing a fourth connector which couples the single
board computer and the first communication link.

30. A method for distributing data communications received from a plurality of web server processing cards, comprising:

providing a first printed circuit board;

5 coupling a chip with the first printed circuit board;

10 coupling first and second connectors with the printed circuit board, each of the first and second connectors adapted to receive a plurality of first ethernet communication links, through a midplane associated with a plurality of web server processing cards;

15 providing a plurality of second ethernet communication links coupling the first connector and the chip;

 providing a plurality of third ethernet communication links coupling the second connector and the chip;

20 providing a high density communication path which couples the chip and a third connector; and

 wherein the chip is operable to distribute data communications between one of the first and second connectors, and the third connector.

31. The method of Claim 30, further comprising:
coupling a fourth connector with the first printed
circuit board;

5 providing a second high density communication path
which couples the chip with the third connector; and

wherein the second high density communication path
and the fourth connector provide at least a portion of a
redundant communication path between the chip and a
network router.

10

32. The method of Claim 30, further comprising:
coupling a fourth connector with the first printed
circuit board;

15 providing a second high density communication path
which couples the chip with the fourth connector; and

wherein the fourth connector is operable to receive
a fifth connector associated with a second network
interface card.

20

33. The method of Claim 30, further comprising:
coupling a single board computer with the first
printed circuit board; and

coupling the chip and the single board computer over
a high density communication path.

25

DATA I/O MANAGEMENT SYSTEM AND METHOD

ABSTRACT OF THE DISCLOSURE

5 A network interface card including a first printed
circuit board is provided. First and second connectors
may be coupled with the first printed circuit board, and
a plurality of ethernet communications links may form at
least a portion of a coupling between the first and
second connectors. The first connector may be configured
10 to receive a third connector associated with a midplane.
A chip may be coupled with the first printed circuit
board wherein the plurality of ethernet communications
links couple the first connector with the chip. A second
communication link may also be provided which couples the
15 chip and the second connector. In accordance with one
embodiment of the present invention the chip consolidates
data received through the first connector for
distribution of the data to the second connector. A
single board computer may be coupled with the first
20 printed circuit board, and a third communication link may
couple the chip with the single board computer.

DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name, that I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention, design or discovery entitled **DATA I/O MANAGEMENT SYSTEM AND METHOD**, the specification of which is attached hereto;

That I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above; that I do not know and do not believe that said invention, design or discovery was ever known or used in the United States of America before my invention or discovery thereof, or patented or described in any printed publication in any country before my invention or discovery thereof, or more than one year prior to this application, or in public use or on sale in the United States of America more than one year prior to this application; that said invention, design or discovery has not been patented or made the subject of an inventor's certificate issued prior to the date of this application in any country foreign to the United States of America on an application filed by me or my legal representatives or assigns; and that I acknowledge the duty to disclose to the U.S. Patent and Trademark Office all information known to me to be material to patentability as defined in 37 C.F.R. § 1.56.

I hereby claim foreign priority benefits under 35 U.S.C. § 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application(s) for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

<u>Number</u>	<u>Country</u>	<u>Date Filed</u>	<u>Priority Claimed</u>
			(Yes) (No)

NONE

I hereby claim the benefit under 35 U.S.C. § 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application(s) in the manner provided by the first

paragraph of 35 U.S.C. § 112, I acknowledge the duty to disclose to the U.S. Patent and Trademark Office all information known to me to be material to patentability as defined in 37 C.F.R. § 1.56 which became available between the filing date of the prior application(s) and the national or PCT international filing date of this application:

Application

<u>Serial Number</u>	<u>Date Filed</u>	<u>Status</u>
NONE		

I hereby appoint:

Jerry W. Mills	Reg. No. 23,005
Robert M. Chiaviello, Jr.	Reg. No. 32,461
Ann C. Livingston	Reg. No. 32,479
Thomas R. Felger	Reg. No. 28,842
Charles S. Fish	Reg. No. 35,870
Kevin J. Meek	Reg. No. 33,738
T. Murray Smith	Reg. No. 30,222
Barton E. Showalter	Reg. No. 38,302
David G. Wille	Reg. No. 38,363
Bradley P. Williams	Reg. No. 40,227
Terry J. Stalford	Reg. No. 39,522
Christopher W. Kennerly	Reg. No. 40,675
Harold E. Meier	Reg. No. 22,428
Douglas M. Kuehl	Reg. No. 41,915
Samir A. Bhavsar	Reg. No. 41,617
Thomas R. Nesbitt, Jr.	Reg. No. 22,075
James J. Maune	Reg. No. 26,946
Roger J. Fulghum	Reg. No. 39,678
Rodger L. Tate	Reg. No. 27,399
Jay M. Cantor	Reg. No. 19,906
Scott F. Partridge	Reg. No. 28,142
James B. Arpin	Reg. No. 33,470
James Remenick	Reg. No. 36,902
Jay B. Johnson	Reg. No. 38,193
Robert W. Holland	Reg. No. 40,020
Floyd B. Chapman	Reg. No. 40,555
Robert A. King	Reg. No. 42,738
James L. Baudino	Reg. No. 43,486
Tara D. Knapp	Reg. No. 43,723
William R. Borchers	Reg. No. 44,549
Robin A. Brooks	Reg. No. 44,563
Brian W. Oaks	Reg. No. 44,981
Luke K. Pedersen	Reg. No. 45,003

Matthew B. Talpis
David M. Doyle
Keiko Ichiye
Jeffery D. Baxter
Thomas A. Beaton
Kurt M. Pankratz
Brian E. Szymczak

Reg. No. 45,152
Reg. No. 43,596
Reg. No. 45,460
Reg. No. 45,560
Reg. No. P46,543
Reg. No. P46,977
Reg. No. P47,120

Patent Agents:

Brian A. Dietzel
Kevin R. Imes

Reg. No. 44,656
Reg. No. 44,795

all of the firm of Baker Botts L.L.P., my attorneys with full power of substitution and revocation, to prosecute this application and to transact all business in the United States Patent and Trademark Office connected therewith, and to file and prosecute any international patent applications filed thereon before any international authorities.

Send Correspondence To:

Baker Botts L.L.P.
2001 Ross Avenue
Dallas, Texas 75201-2980

Direct Telephone Calls To:


Kevin J. Meek
at 214.953.6680
Atty. Docket No. 067856.0110

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

Full name of the sole or first inventor:

Christopher G. Hipp

Inventor's signature



Date

7.20.00


Residence (City, County, State)
Citizenship
Post Office Address

Dallas (Dallas), Texas 75214
U.S.A.
6242 Llano Avenue
Dallas, TX 75214

Full name of joint inventor:

Walter L. Johnston, Jr.

Inventor's signature



Date

2/20/00

Residence (City, County, State)

Plano (Collin), Texas 75075

Citizenship

U.S.A.

Post Office Address


3520 Pinehurst Drive

Plano, TX 75075

Full name of joint inventor:

Guy B. Irving

Inventor's signature



Date

7/20/00

Residence (City, County, State)

Carrollton (Denton), Texas 75007

Citizenship

U.S.A.

Post Office Address

2017 Crestside Drive

Carrollton, TX 75007

Full name of joint inventor:

David M. Kirkeby

Inventor's signature

Date

Residence (City, County, State)

Fullerton (Organge), CA 92833

Citizenship

U.S.A.

Post Office Address

1266 Candlewood Drive

Fullerton, CA 92833

Full name of joint inventor:

Walter R. Otto

Inventor's signature

Date

Residence (City, County, State)

Upland (San Bernardino), CA 91784

Citizenship

U.S.A.

Post Office Address

907 Gina Court

Upland, CA 91784

ATTORNEY DOCKET NO.
067856.0110

DECLARATION AND
POWER OF ATTORNEY

4

Full name of joint inventor:

Walter L. Johnston, Jr.

Inventor's signature

Date

Residence (City, County, State)

Plano (Collin), Texas 75075

Citizenship

U.S.A.

Post Office Address

3520 Pinehurst Drive

Plano, TX 75075

Full name of joint inventor:

Guy B. Irving

Inventor's signature

Date

Residence (City, County, State)

Carrollton (Denton), Texas 75007

Citizenship

U.S.A.

Post Office Address


2017 Crestside Drive

Carrollton, TX 75007

Full name of joint inventor:

David M. Kirkeby

Inventor's signature



Date

July 20, 2000

Residence (City, County, State)

Fullerton (Orange), CA 92833

Citizenship

U.S.A.

Post Office Address


1266 Candlewood Drive

Fullerton, CA 92833

Full name of joint inventor:

Walter R. Otto

Inventor's signature



Date

7/20/2000

Residence (City, County, State)

Upland (San Bernardino), CA 91784

Citizenship


U.S.A.

Post Office Address

907 Gina Court

Upland, CA 91784

DAL01:538777.1

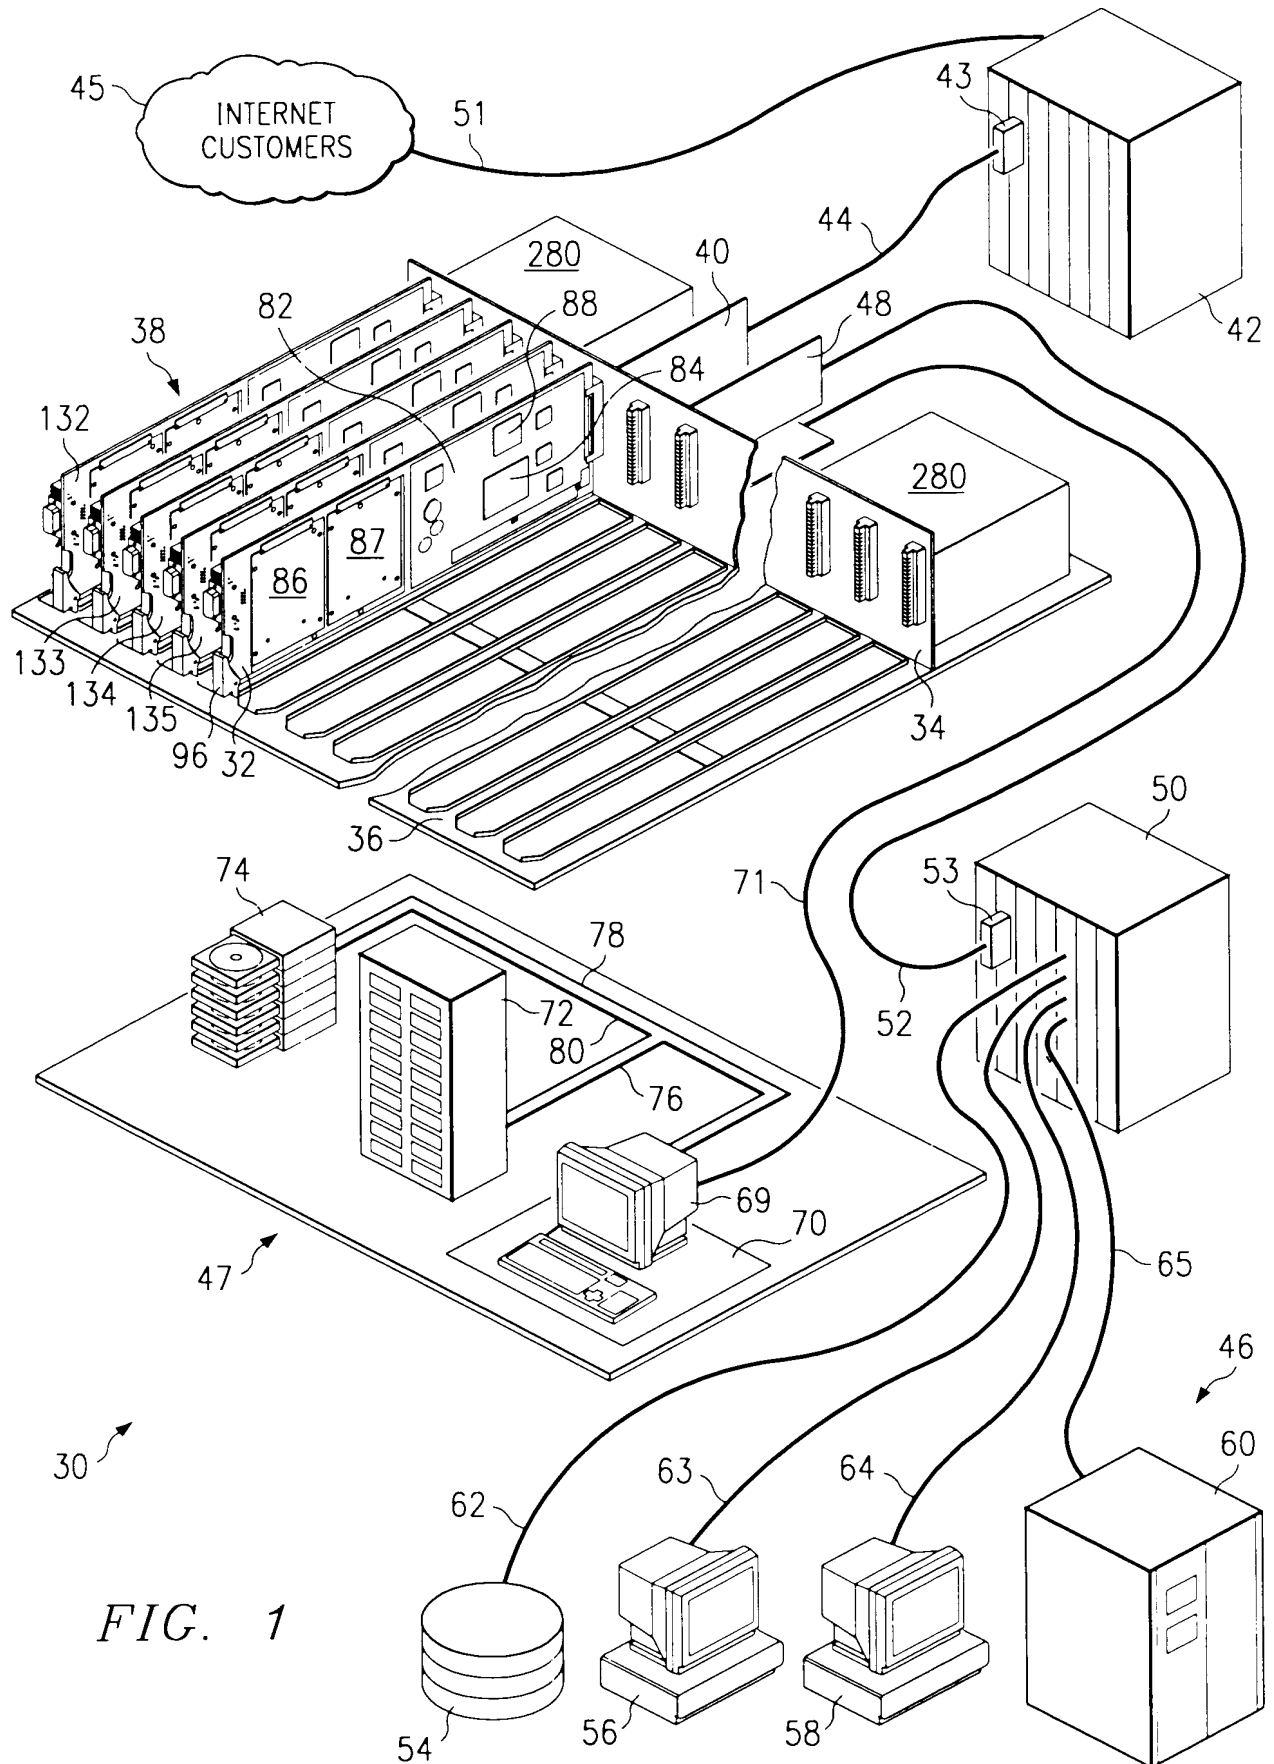

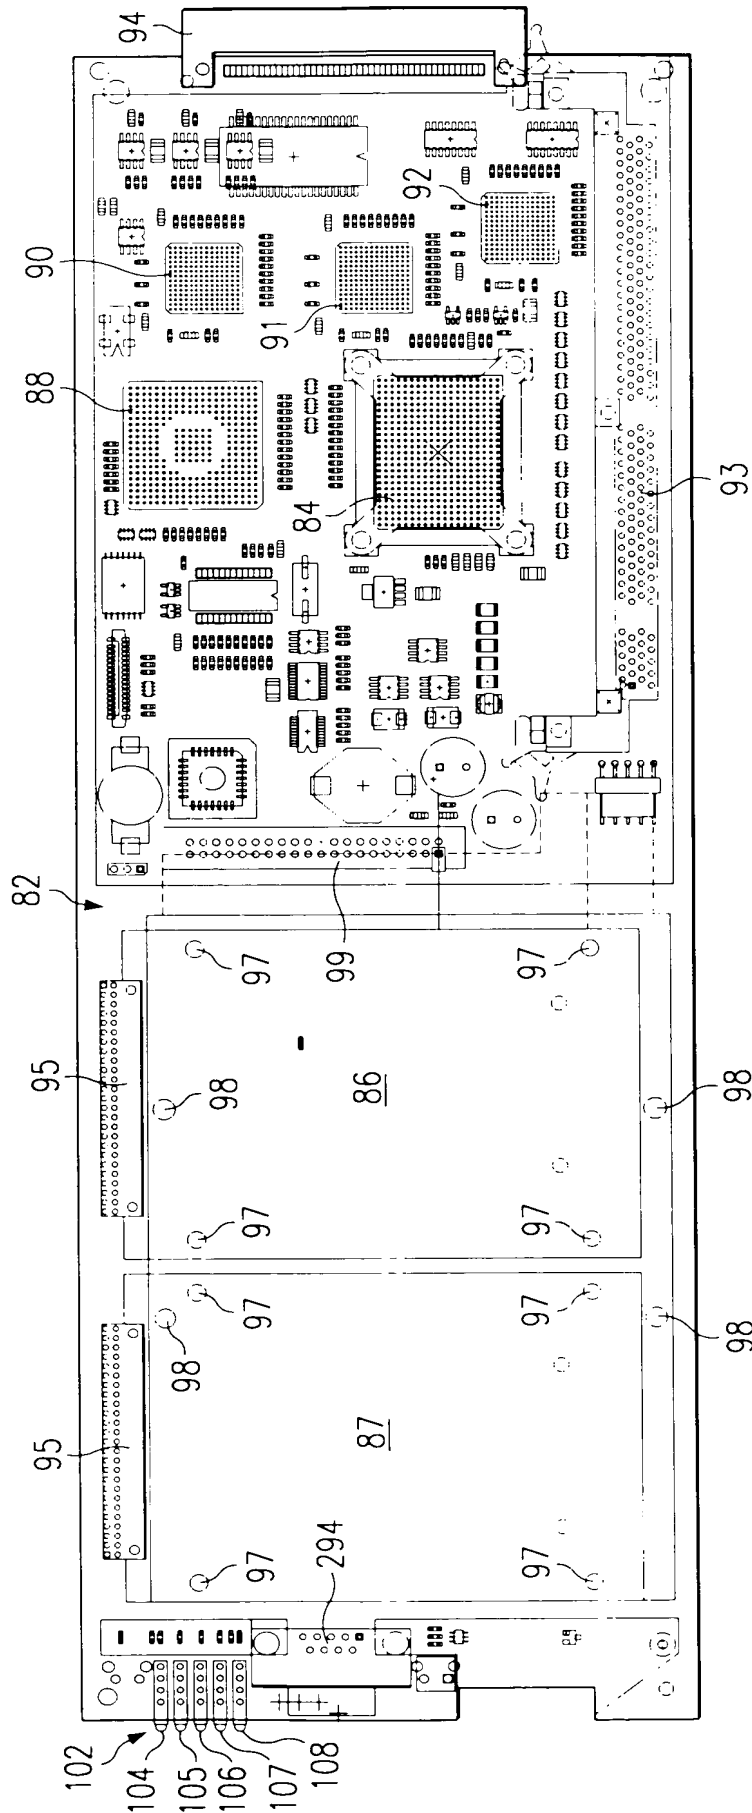


FIG. 2

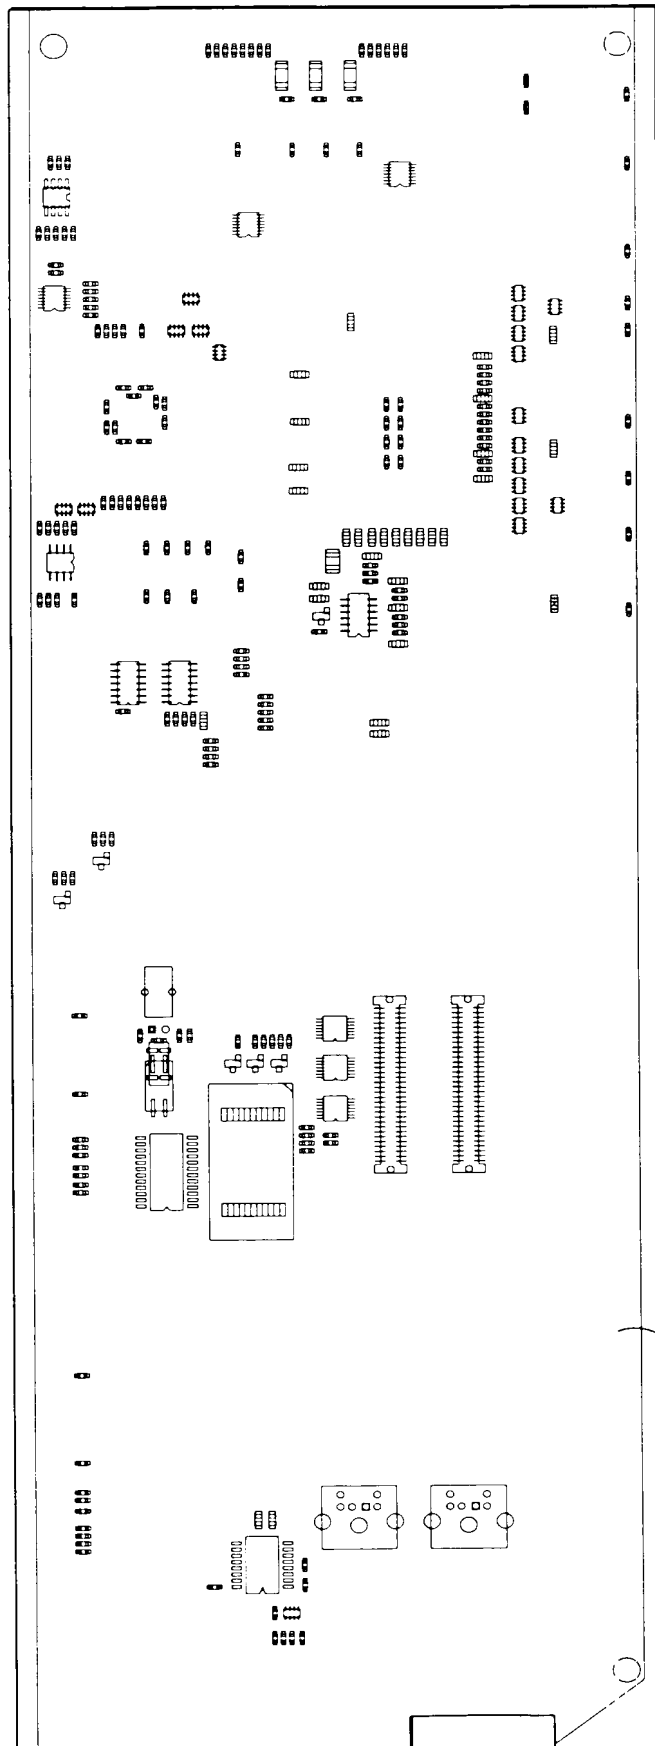


FIG. 3

82

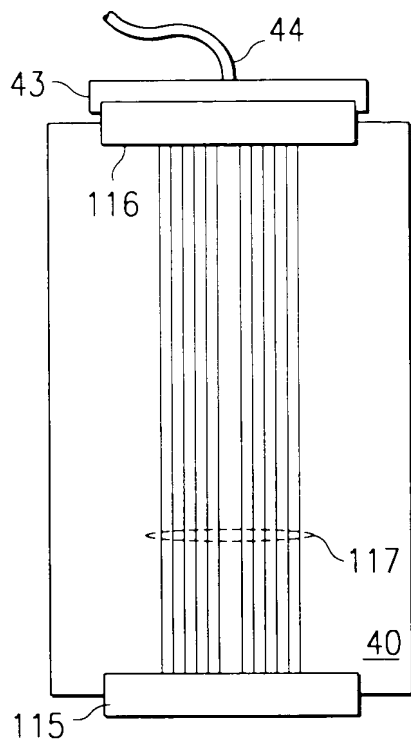


FIG. 4

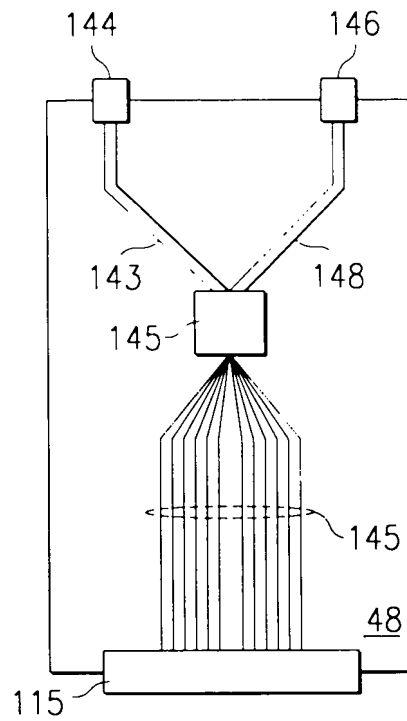


FIG. 5

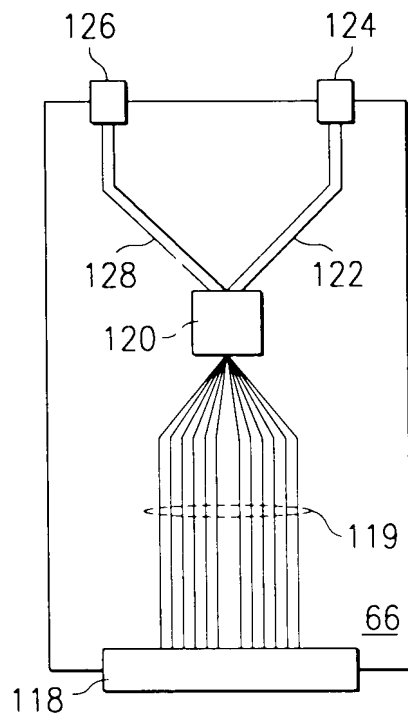


FIG. 6

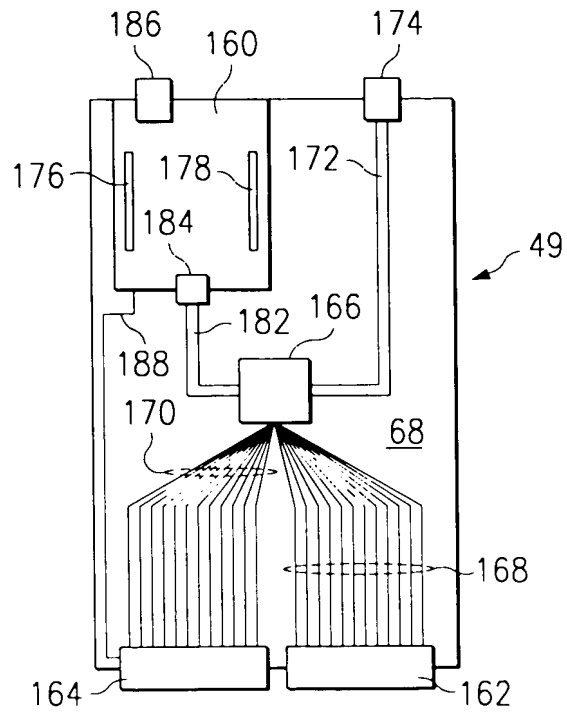
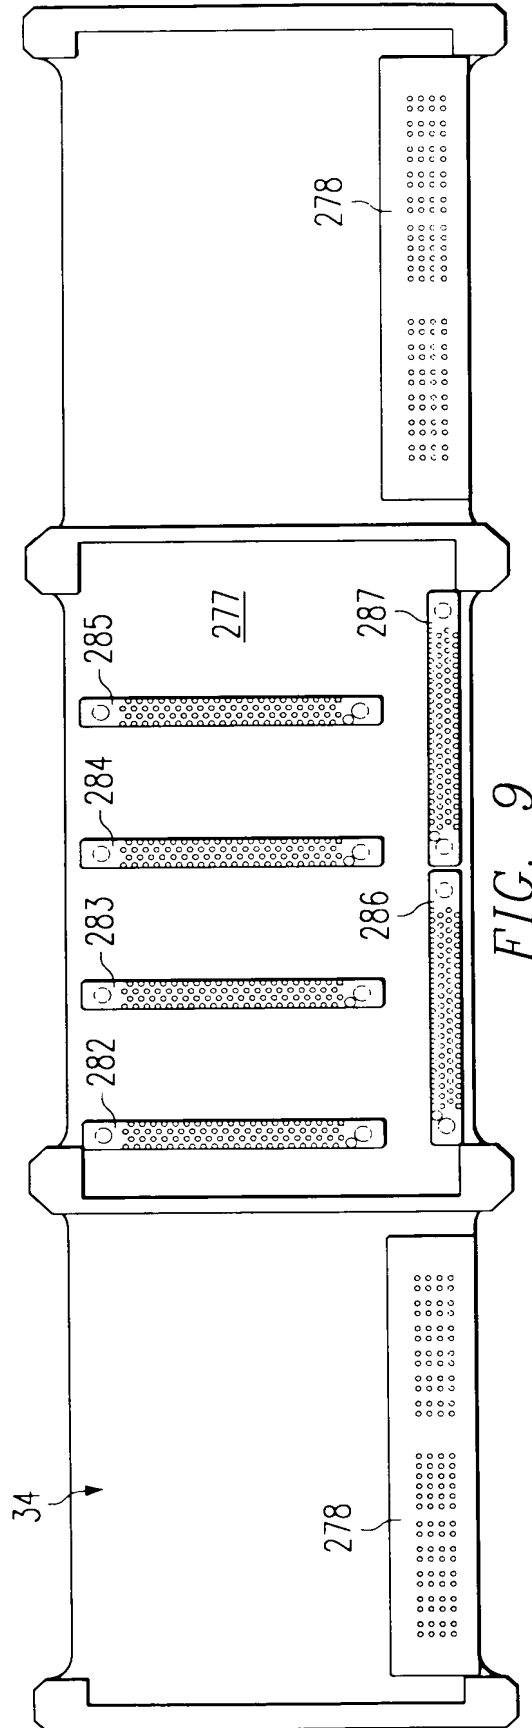
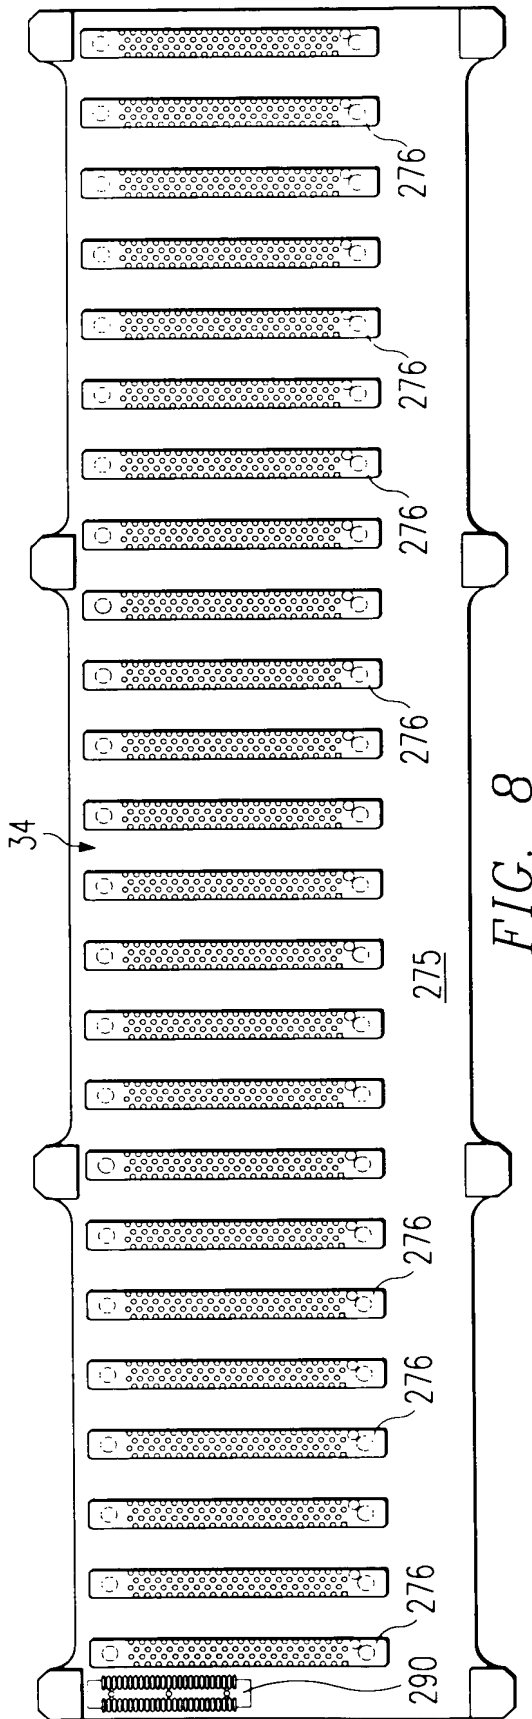



FIG. 7





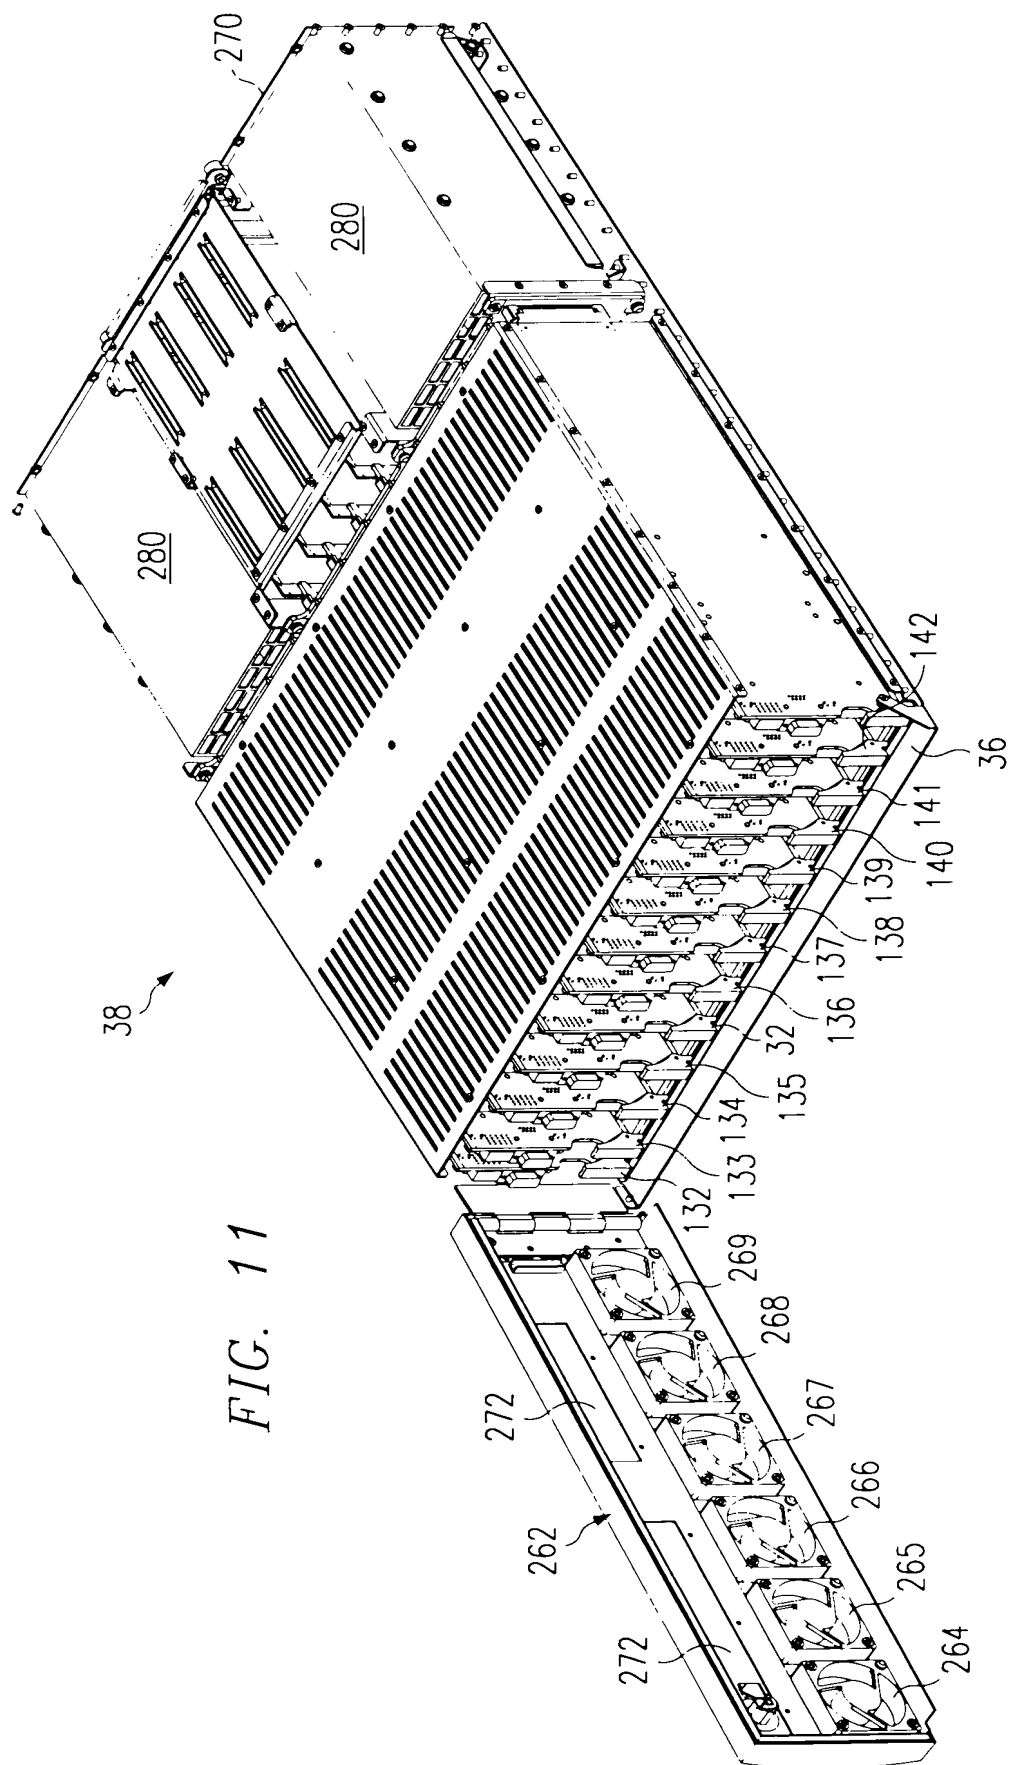


FIG. 11

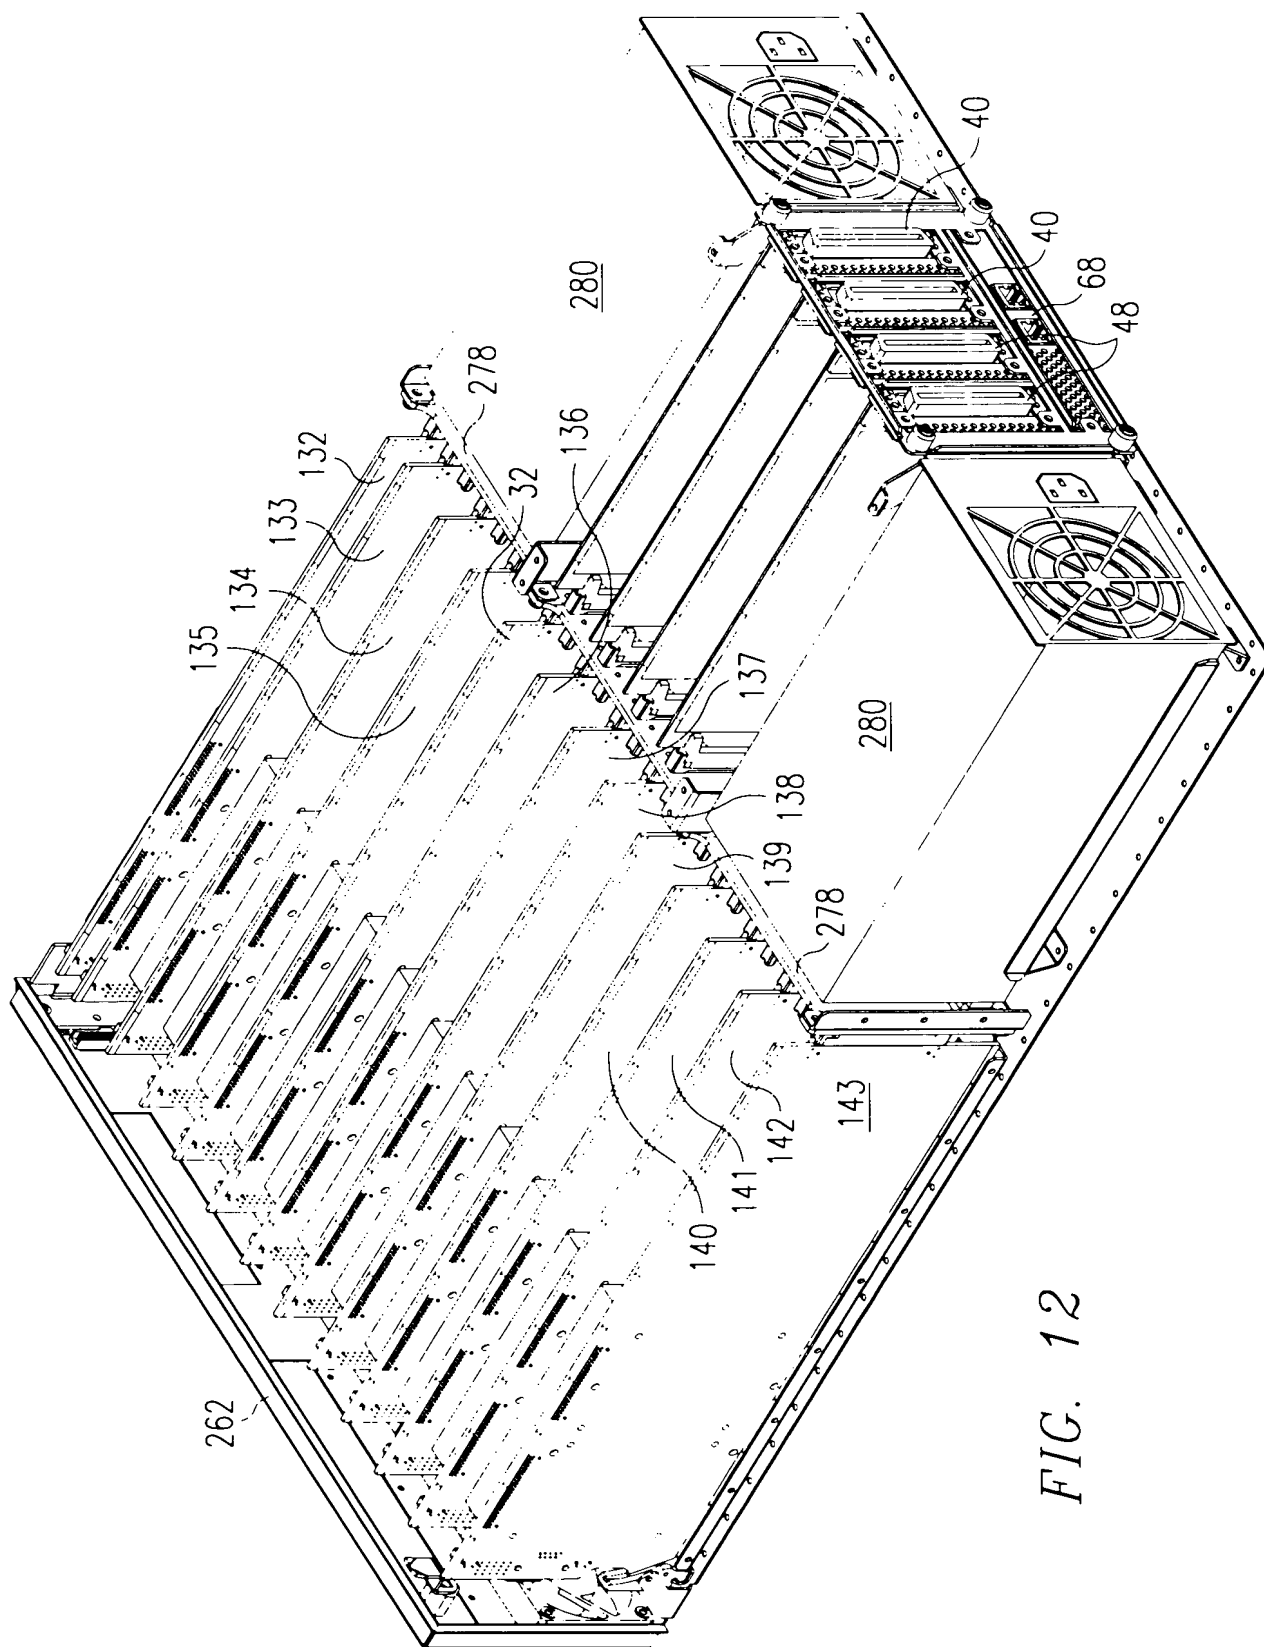


FIG. 12

FIG. 13

